
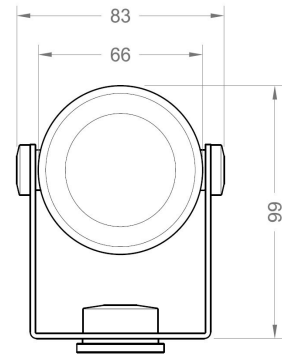


Odino 15P

Projectors | IP67 | Class II | Dimmable

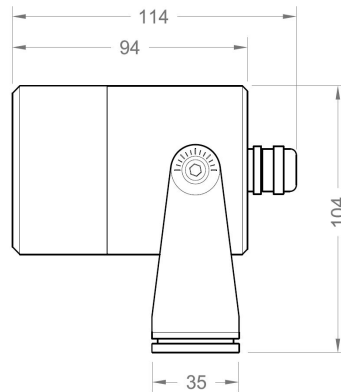

LIGHT SOURCE & OPTIC

Power

15W

Lens

20°

30°

Beam Direction

Adjustable:

Tilting +/-120°, rotating +/-355°,

Symmetrical

Material

PMMA + glass

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2700K CRI>80

3000K CRI>80

Lifetime

(L85) >50.000 hrs

FIXTURE

Dimensions

Ø 66mm x H 114mm (cylinder)

Material

Aluminium

Body finishes

Black

Dark bronze

Gray

Weight

675gr

Mounting

On surface

Fixing

Applique

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Main voltage:

220-240Vac

Driver requirement

Driverless technology

Control

On/Off

DALI (with optional dimmer-not included)

Feature



Water Infiltration Protection System

Odino 15P

PHOTOMETRIC DATA (3000K CRI>80)

15W - 20° | UGR 9

15W - 30° | UGR 10



H (m)	D (m)	Eav (lx)
1	0.35	2690
2	0.69	672
3	1.04	299
4	1.39	168
5	1.73	108

H (m)	D (m)	Eav (lx)
1	0.54	1505
2	1.08	376
3	1.62	167
4	2.16	94
5	2.71	60

Total lumen output
617 lm

Total lumen output
762 lm


Efficacy
41 lm/W

Efficacy
51 lm/W

Odino 15P


ACCESSORIES

Low glare visor (A00936._0)




INSTALLATION ACCESSORIES

Stainless Steel 316L stake (A00281.60)



Watertight connector (A01023.40)



SUGGESTED REMOTE DRIVER

Dimmable (DALI):
D300-D-1CH-NT

