


Odino 6P

Projectors | IP67 | Class I | Dimmable

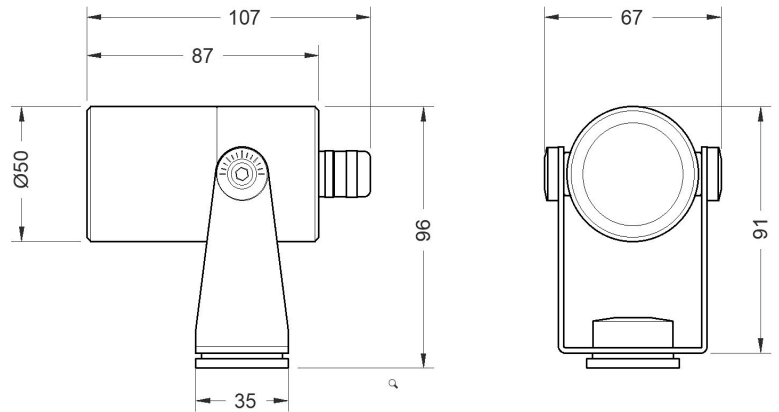

LIGHT SOURCE & OPTIC

Power

6W

Optics

30° Lens
50° Reflector

Beam Direction

Adjustable:
Tilting +/-120°, rotating +/-355°,
Symmetrical

Material

PMMA + glass

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2700K CRI>90
3000K CRI>90

Lifetime

(L70) >33.000 hrs

FIXTURE

Dimensions

Ø 50mm x H 107mm (cylinder)

Material

Aluminium

Body finishes

Black
Dark bronze
Gray

Weight

350gr

Mounting

On surface

Fixing

Applique

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Main voltage:
220-240Vac

Driver requirement

Driverless technology

Control


On/off
DALI (with optional dimmer-not included)

Feature

Water Infiltration Protection System

Odino 6P


PHOTOMETRIC DATA (3000K CRI>90)

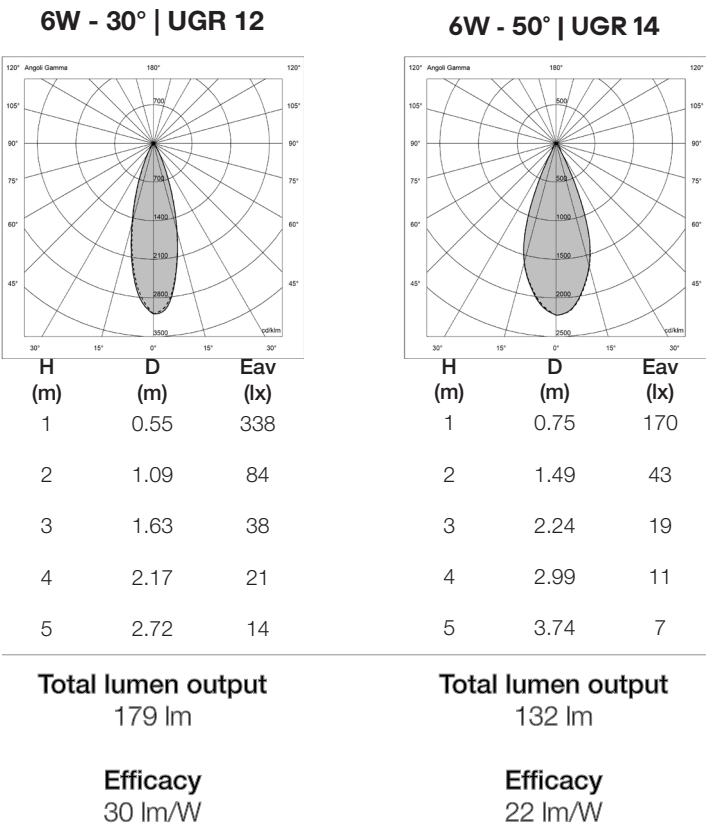


Odino 6P

ACCESSORIES

Low glare visor (A00519._0)




Low glare snoot (A00848._0)




INSTALLATION ACCESSORIES

Stainless Steel 316L stake (A00281.60)



Watertight connector (A01023.40)



SUGGESTED REMOTE DRIVER

Dimmable (DALI):
D300-D-1CH-NT

