


# Piega 140 IP67 m

Step Light | IP67 | Class III - II | Dimmable

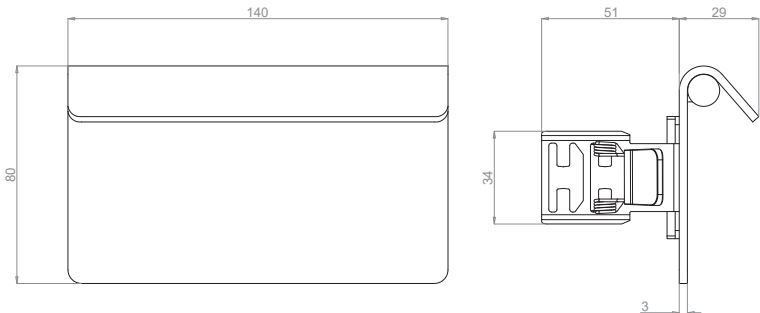

## LIGHT SOURCE & OPTIC

**Power**  
4W

**Lens**  
Diffuse emission

**Beam Direction**  
Fixed

**Material**  
PMMA

**LED quantity**  
28

**Binning**  
2 MacAdam steps

**Color temperature & quality**  
2200K  
3000K  
3000K CRI>90  
4000K CRI>90

**Lifetime**  
(L90) >55.000 hrs

## FIXTURE

**Dimensions**  
140mm x 29mm x 80mm

**Material**  
Aluminium

**Body finishes**  
Black - RAL 9005  
Anthracite Grey - RAL 7016  
Corten  
Oyster White - RAL 1013  
White - RAL 9003

**Weight**  
170gr

**Mounting**  
Wall Mounting

**Fixing**  
Wall Recessed

**Working temperature**  
-20° / +40°

## ELECTRICAL FEATURES

**Power supply**  
Main Voltage:  
24Vdc  
220-240Vac


**Driver requirement**  
Remote (not included)  
Built-in

**Control**  
On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

# Piega 140 IP67 m

## PHOTOMETRIC DATA (3000K CRI>80)

1W - 45° | UGR 12.5



H (m)	D (m)	Eav (lx)
1	2.17	53
2	4.34	13
3	6.51	6
4	8.68	3
5	10.85	2


Total lumen output  
159 lm

Efficacy  
40 lm/W

# Piega 140 IP67 m

## INSTALLATION ACCESSORIES


Micro watertight connector (A00357.40)



## SUGGESTED REMOTE DRIVER

**On/off:**

CV30-F-24-PI

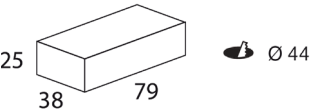

**Multifunction (DALI 2, 0/1-10V, PUSH):**

CV25-D-24-PI

