



Piega 140 IP67

Step Light | IP67 | Class III - II | Dimmable

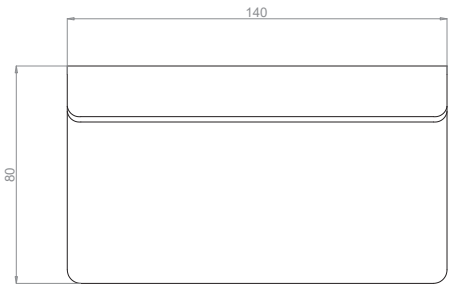

LIGHT SOURCE & OPTIC

Power
4W

Lens
Diffuse emission

Beam Direction
Fixed

Material
PMMA

LED quantity
28

Binning
2 MacAdam steps

Color temperature & quality
2200K
3000K
3000K CRI>90
4000K CRI>90

Lifetime
(L90) >55.000 hrs

FIXTURE

Dimensions
140mm x 29mm x 80mm

Material
Aluminium

Body finishes
Black - RAL 9005
Anthracite Grey - RAL 7016
Corten
Oyster White - RAL 1013
White - RAL 9003

Weight
170gr

Mounting
Wall Mounting

Fixing
Wall Recessed

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Main Voltage:
24Vdc
220-240Vac


Driver requirement
Remote (not included)
Built-in

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Piega 140 IP67

PHOTOMETRIC DATA (3000K CRI>80)

1W - 45° | UGR 12.5

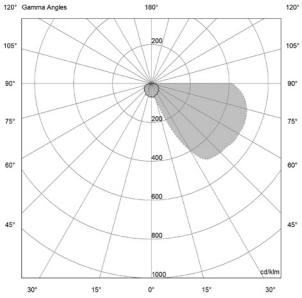

H (m)	D (m)	Eav (lx)
1	2.17	53
2	4.34	13
3	6.51	6
4	8.68	3
5	10.85	2


Total lumen output
159 lm

Efficacy
40 lm/W

Piega 140 IP67


INSTALLATION ACCESSORIES

Recessed box 503E (A00882.00)



 75x108 mm


Micro watertight connector (A00357.40)

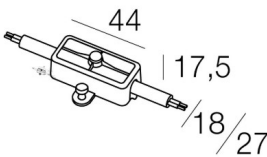

SUGGESTED REMOTE DRIVER

On/off:

CV30-F-24-PI

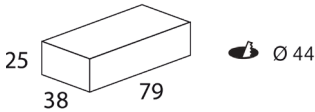

Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-D-24-PI

