


# POIS 70 IP67

Surface lights | IP67 | Class III | Dimmable

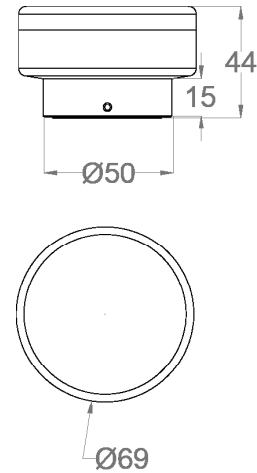

## LIGHT SOURCE & OPTIC

### Power

4W

### Emission

Diffused

### Beam Direction

Fixed, Symmetrical

### Material

Glass

### LED quantity

35

### Binning

2 MacAdam steps

### Color temperature & quality

2700K

3000K CRI>80/90

4000K

### Lifetime

(L70) >54.000 hrs

## FIXTURE

### Dimensions

Ø 69mm x H 44mm

### Material

Aluminium

### Body finishes

Black (RAL 9005)

Moka (RAL 1247)

Anthracite gray (RAL 7016)

Corten

Intense Bronze

Agate Gray (RAL 7038)

White (RAL 9003)

### Weight

322gr

### Mounting

Surface Mounting

### Fixing

Screws

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant tension:

24Vdc

### Driver requirement

Remote (not included)

### Control

On/off

Push switch

Phase Cut

0/1-10 V


Casambi

DALI

# POIS 70 IP67

PHOTOMETRIC DATA (3000K CRI>90)

4W | UGR 26

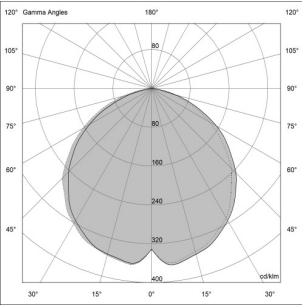

H (m)	D (m)	Eav (lx)
1	2.90	12
2	5.80	3
3	8.70	1
4	11.60	1
5	14.50	0

Total lumen output  
131 lm


Efficacy  
33 lm/W

# POIS 70 IP67

## SUGGESTED REMOTE DRIVERS

### On/off:


CV20-F-24-N



Ø 60

### Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-24-NI



Ø 44

Other options upon request