

LIGHT SOURCE

LED quantity	35
Power max	4 W
Total lumen output (3000K)	131 lm
Efficacy lm/W (3000K)	33 lm/W
LOR (3000K)	-
CRI	>80
LED Temperature (K)	2700K - 3000K – 4000K
Average operational life	50.000 hours

OPTIC

Material	Polycarbonate
Available optics	Diffused emission
Beam direction	Fixed
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum, Tempered glass
Finish	Painted (Gold, Black, Agate gray, Bronze, White, Oyster white)
Available finishes	Gold, Black, Agate gray, Bronze, White, Oyster white
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection	In parallel at 24Vdc
Class	III

MECHANICAL FEATURES

Dimensions (mm):	Ø69 x 44
Weight	-
Mounting	Wall, Ceiling
Cut-out (mm)	-
Use	Indoor

NOTES

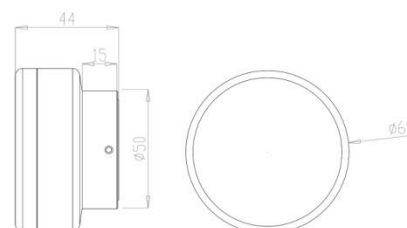

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
110°			
0.60	1.74	131	34
1.20	3.48	33	9
1.80	5.22	15	4
2.40	6.96	8	2
3.00	8.70	5	1