



Q8 lenti

Linear system | IP40 | Class III | Dimmable

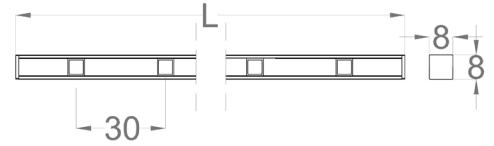

M
Magnetic Fixing

B
Double Sided Tape

LIGHT SOURCE & OPTIC

Power
25W/m

Lens
20°
30°
50°

Beam Direction
Fixed, Symmetrical

Material
Polycarbonate

LED quantity
34

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90

Lifetime (Ta 25°)
L85 >95.000 hrs

FIXTURE

Dimensions
D 8mm x H 8mm x L:
010 019 028 037 046 055 064 073 082 091
100 109 118 127 136 145 154 163 172 181
190

Material
Aluminium

Body finishes
Black
Gray

Weight
120gr/m

Mounting
On surface

Fixing
Magnetic fixing
Double sided tape
Through accessories (see page 3)

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant tension: 12 Vdc


Driver
Remote (not included)

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Q8 lenti

PHOTOMETRIC DATA (3000K CRI>90)

25W/m - 20° | UGR 20

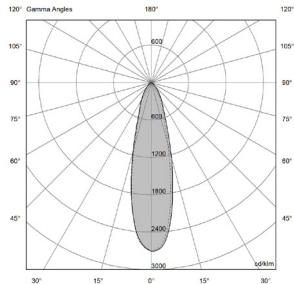


H (m)	D (m)	Eav (lx)
1	0.48	898
2	0.96	224
3	1.43	100
4	1.91	56
5	2.39	36

Total lumen output
1253 lm

Efficacy
50 lm/W

25W/m - 30° | UGR 29

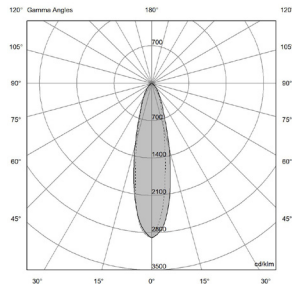


H (m)	D (m)	Eav (lx)
1	0.86	265
2	1.73	66
3	2.59	29
4	3.45	17
5	4.32	11

Total lumen output
1297 lm

Efficacy
52 lm/W

25W/m - 50° | UGR 29

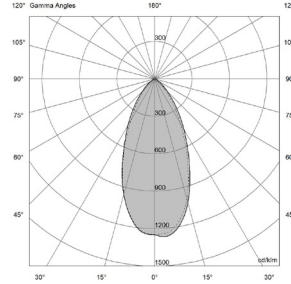

H (m)	D (m)	Eav (lx)
1	0.49	815
2	0.98	204
3	1.47	91
4	1.98	51
5	2.46	33


Total lumen output
960 lm

Efficacy
38 lm/W


INSTALLATION ACCESSORIES

Magnetic brackets


Only for Cometa Q8 without fixing

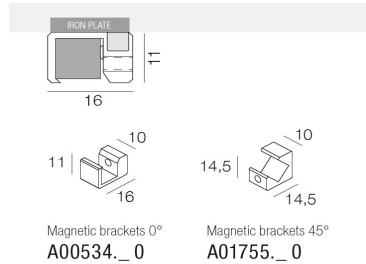**Brackets and screws**


Only for Cometa Q8 without fixing

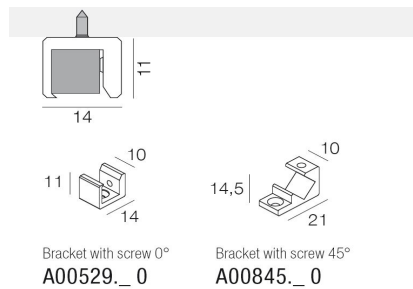**Mounting clips**

Only for Cometa Q8 without fixing

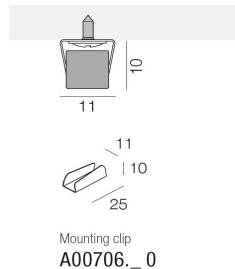**Iron plate (A01744.H0)**


Only for Cometa Q8 with magnetic fixing




SUGGESTED REMOTE DRIVERS

On/Off :

CV20-F-12-N

**Multifunction (DALI 2, 0/1-10V, PUSH):**

CV25-DM-12-NI



Other options upon request