


Sinfonia lenti

Showcase Lighting | IP40 | Class III | Dimmable

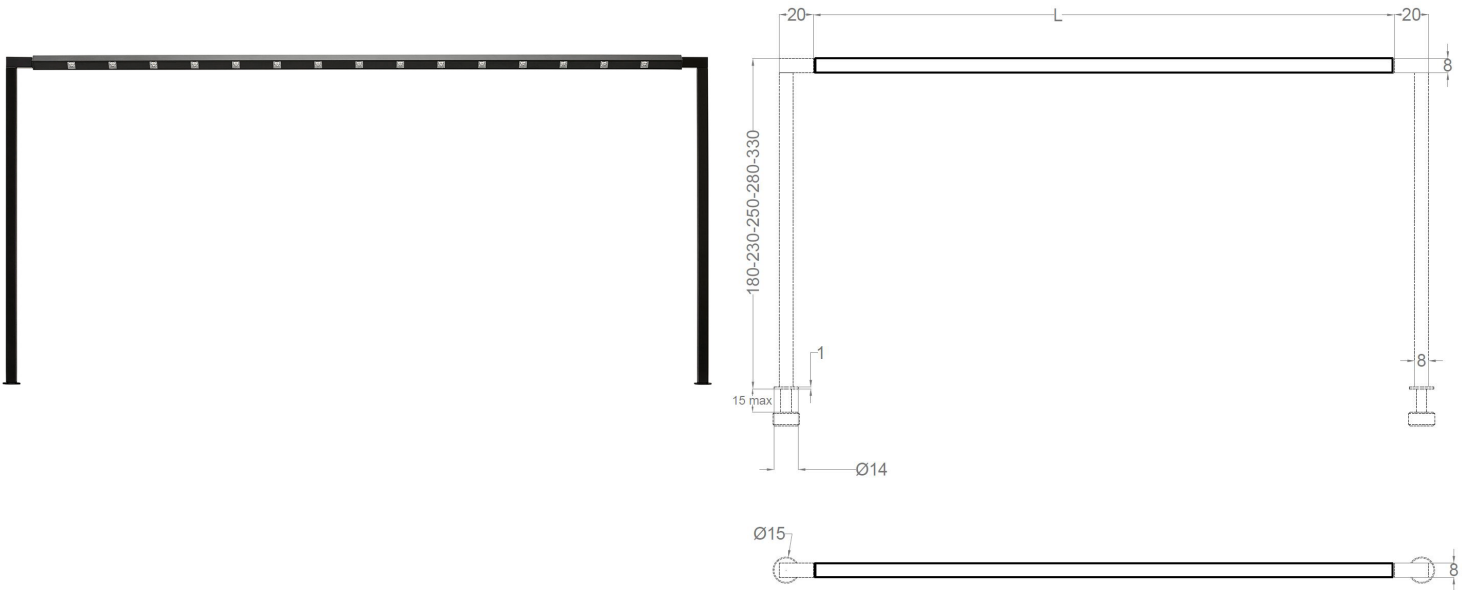

LIGHT SOURCE & OPTIC

Power

25W/m

Lens

20°

30°

50°

Beam Direction

Adjustable: Tilting +/- 360°, Symmetrical

Material

Polycarbonate

LED quantity

34

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80

2700K CRI>90

3000K CRI>90

3500K CRI>90

4000K CRI>90

Lifetime (Ta 25°)

L85 >95.000 hrs

FIXTURE

Dimensions

D 8mm x H 8mm x L:

030 039 048 057

066 075 084 093

102

Material

Aluminium

Body finishes

Black

Gray

Weight

210gr/m

Mounting

On poles (see accessories, page 3)

Fixing

Screw base : Ø 8mm

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 12 Vdc

Driver

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V

Casambi

DALI

Feature

Magnetic joint




L = Length not including poles with magnetic joint

Sinfonia lenti

PHOTOMETRIC DATA (3000K CRI>90)

25W/m - 20° | UGR 20




H (m)	D (m)	Eav (lx)
1	0.48	898
2	0.96	224
3	1.43	100
4	1.91	56
5	2.39	36

Total lumen output
1253 lm

Efficacy
50 lm/W

25W/m - 30° | UGR 29




H (m)	D (m)	Eav (lx)
1	0.86	265
2	1.73	66
3	2.59	29
4	3.45	17
5	4.32	11

Total lumen output
1297 lm

Efficacy
52 lm/W

25W/m - 50° | UGR 29



H (m)	D (m)	Eav (lx)
1	0.49	815
2	0.98	204
3	1.47	91
4	1.98	51
5	2.46	33


Total lumen output
960 lm

Efficacy
38 lm/W

INSTALLATION ACCESSORIES

Poles

Necessary element: please specify always 1 kit in the purchase order




	Linear pole	T pole	Corner pole
H 18 cm	A00839._0	A00928._0	A00932._0
H 23 cm	A00840._0	A00929._0	A00933._0
H 28 cm	A00841._0	A00930._0	A00934._0
H 33 cm	A00842._0	A00931._0	A00935._0

SUGGESTED REMOTE DRIVERS

On/Off :


CV20-F-12-N



Ø 60

Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-12-NI



Ø 44

Other options upon request