

# Sinfonia lenti

Indoor | Showcase Lighting | IP40 | Class III |

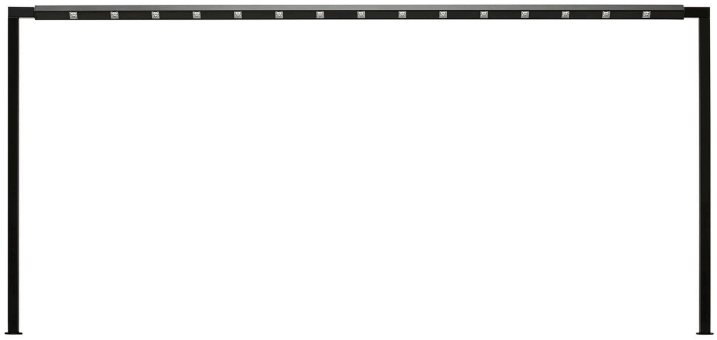

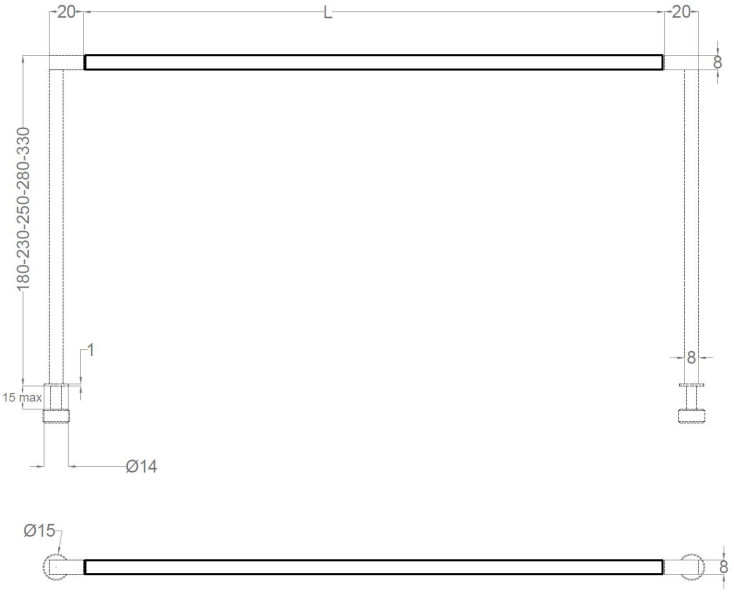


## LIGHT SOURCE & OPTIC

**Power**
25W/m

**Lens**
20°
30°
50°

**Beam Direction**
Adjustable: Tilting +/- 360°, Symmetrical

**Material**
Polycarbonate

**LED quantity**
34

**Binning**
2 MacAdam steps

**Color temperature & quality**
2200K CRI>80
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90

**Lifetime (Ta 25°)**
$L_{85}$ >95.000 hrs

**Source Flux (3000K CRI>90)**
1825 lm/m

## FIXTURE

**Dimensions**
D 8mm x H 8mm x L:
030 039 048 057
066 075 084 093
102

**Material**
Aluminium

**Body finishes**
Black
Gray

**Weight**
210gr/m

**Mounting**
On poles (see accessories, page 3)

**Fixing**
Screw base : Ø 8mm

**Working temperature**
-20° / +40°

## ELECTRICAL FEATURES

**Power supply**
Constant tension: 12 Vdc

**Driver**
Remote (not included)

**Control**
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

**Feature**
Magnetic joint




L = Length not including poles with magnetic joint




Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026

# Sinfonia lenti

## PHOTOMETRIC DATA (3000K CRI>90)

### 25W/m - 20° | UGR 20





| H (m) | D (m) | Eav (lx) |
|---|---|---|
| 1 | 0.49 | 2132 |
| 2 | 0.96 | 533 |
| 3 | 1.47 | 237 |
| 4 | 1.96 | 133 |
| 5 | 2.46 | 85 |

**Total lumen output**
1254 lm

**Efficacy**
50 lm/W

### 25W/m - 30° | UGR 29





| H (m) | D (m) | Eav (lx) |
|---|---|---|
| 1 | 0.48 | 2348 |
| 2 | 0.96 | 589 |
| 3 | 1.43 | 261 |
| 4 | 1.91 | 147 |
| 5 | 2.39 | 94 |

**Total lumen output**
1298 lm

**Efficacy**
52 lm/W

### 25W/m - 50° | UGR 29




| H (m) | D (m) | Eav (lx) |
|---|---|---|
| 1 | 0.89 | 694 |
| 2 | 1.79 | 173 |
| 3 | 2.68 | 77 |
| 4 | 3.58 | 43 |
| 5 | 4.47 | 28 |

**Total lumen output**
960 lm

**Efficacy**
38 lm/W




Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026

## INSTALLATION ACCESSORIES

### Poles

Necessary element: please specify always 1 kit in the purchase order





| | Linear pole | T pole | Corner pole |
|---|---|---|---|
| H 18 cm | A00839._0 | A00928._0 | A00932._0 |
| H 23 cm | A00840._0 | A00929._0 | A00933._0 |
| H 28 cm | A00841._0 | A00930._0 | A00934._0 |
| H 33 cm | A00842._0 | A00931._0 | A00935._0 |

## SUGGESTED REMOTE DRIVERS


### On/Off :

CV70-F-12-N




### Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-12-NI




Ø 44

Other options upon request



Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026