


# Ted T H600

Bollards | IP67 | Class II | Not dimmable

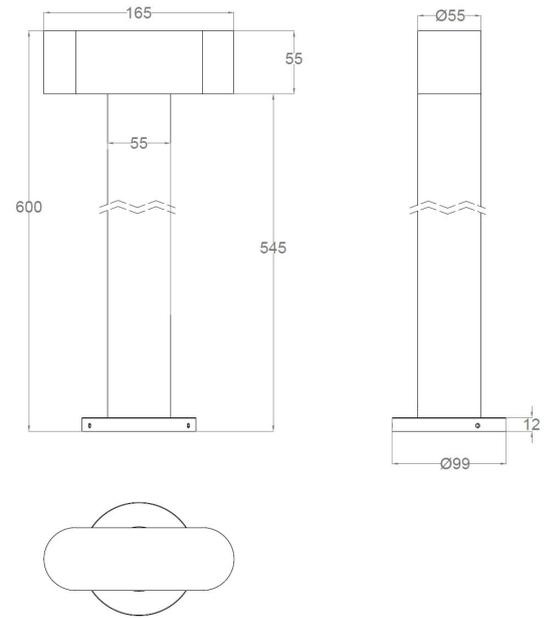

## LIGHT SOURCE & OPTIC

### Power

6Wx2

### Optic

Asymmetric lens

### Beam Direction

Fixed, Asymmetric

### Material

PMMA+glass

### LED quantity

1

### Binning

2 MacAdam steps

### Color temperature & quality

2200K CRI>80  
2700K CRI>80  
3000K CRI>80/90  
3500K CRI>80  
4000K CRI>80

### Lifetime (Ta 25°)

L90 >60.500 hrs

## FIXTURE

### Dimensions

L165mm x D55mm x H600mm

### Material

Aluminium

### Body finishes

Black (RAL 9005)  
Moka (RAL 1247)  
Anthracite Grey (RAL 7016)  
Olive green (RAL 6014)

### Weight

2400gr

### Mounting

Floor Mounting

### Fixing

Applique  
With accessories (see page 3)

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Main Voltage:  
220-240Vac

### Driver requirement

Built-in

### Control

On/off


### Feature

Water Infiltration Protection System

# Ted T H600

## PHOTOMETRIC DATA (3000K CRI>80)

### 6Wx2 - 40°Asy | UGR 22



H (m)	D (m)	Eav (lx)
1	580	307
2	140	77
3	62	34
4	35	19
5	22	12

### Total lumen output


376 lm x 2

### Efficacy

62 lm/W

**INSTALLATION ACCESSORIES**

Anchor for concrete (A00870.60)



Watertight connector (A00387.40)

