



Tini B Micro

Low voltage track projectors | IP40 | Class III | Dimmable

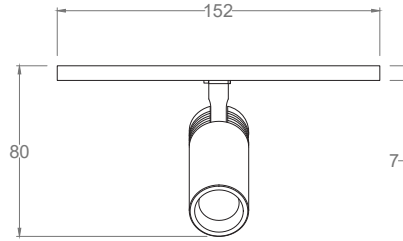

LIGHT SOURCE & OPTIC

Power

4W

Lens

15°/30°/60°/Elliptical

Beam Direction

Adjustable:
Tilting +/-90°, rotating +/-355°
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>90
2700K CRI>80/90
3000K CRI>80/90
4000K
5000K

Lifetime

(L90) >60.000 hrs

FIXTURE

Dimensions

Ø 28mm x H 76mm (cylinder)

Material

Aluminium

Body finishes

Black (RAL 9005)
Dark Bronze
White (RAL 9003)

Weight

90gr

Mounting

On track

Fixing

Track Connector

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension:
24-48Vdc
Typical Vf= 3V x 3

Driver requirement

Remote (not included)


Control

On/off
DALI
Broadcast

Tini B Micro

PHOTOMETRIC DATA (3000K CRI>90)

4W - 15° | UGR 17




H (m)	D (m)	Eav (lx)
1	0.49	760
2	0.98	190
3	1.47	84
4	1.95	47
5	2.44	30

Total lumen output
192lm

Efficacy
48 lm/W

4W - 30° | UGR 19




H (m)	D (m)	Eav (lx)
1	0.61	538
2	1.23	134
3	1.84	60
4	2.45	34
5	3.06	22

Total lumen output
178 lm

Efficacy
44 lm/W

4W - 60° | UGR 21




H (m)	D (m)	Eav (lx)
1	0.86	206
2	1.71	51
3	2.57	23
4	3.43	13
5	2.28	8

Total lumen output
129 lm

Efficacy
32 lm/W

4W-Elliptical | UGR 15



H (m)	D (m)	Eav (lx)
1	0.44	725
2	0.89	181
3	1.33	81
4	1.78	45
5	2.22	29

Total lumen output
283 lm

Efficacy
71 lm/W


Tini B Micro

INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Micro Track:



Standard track (A00918._0)

1m





Trimless track (A01064._0)

1m



Suspended track (A01664._0)

1m




SUGGESTED REMOTE DRIVER

On/Off :

CC70-F-24-N

CV70-F-48-N




Ø 70

For On/Off and DALI version.
Please consider 1 address for each DALI projector.

Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI

CV75-DM-48-NI



Ø 49

For Broadcast version.
Please consider 1 address for each driver in case of DALI control.

Other options upon request