


Tono Zoom

Projectors | IP67 | Class II | Dimmable

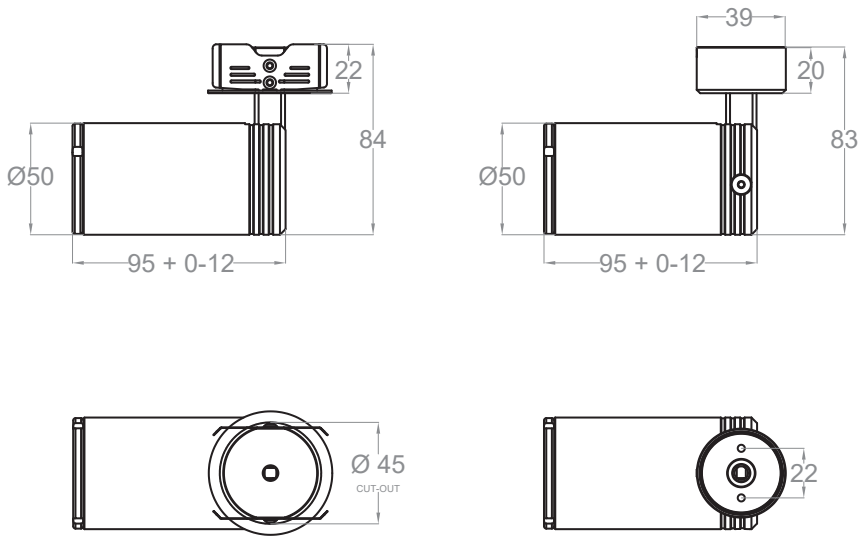

LIGHT SOURCE & OPTIC

Power
10W

Lens
zoom 14°/36°

Beam Direction
Adjustable:
Tilting +/-100°, rotating +/-355°,
Symmetrical

Material
PMMA + glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>90
2400K CRI>90
2700K CRI>90
2700K CRI>95
3000K CRI>80
3000K CRI>90
3000K CRI>95
3500K CRI>90
3500K CRI>95
4000K CRI>90

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 49.5mm x H 94.5mm (cylinder)

Material
Aluminium

Body finishes
Black
White
All White

Weight
350gr

Mounting
On surface

Fixing
Springs
Base for inner connection

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Main Voltage:
500 mA

Driver requirement
Remote (not included)

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Tono Zoom


PHOTOMETRIC DATA (3000K CRI>90)

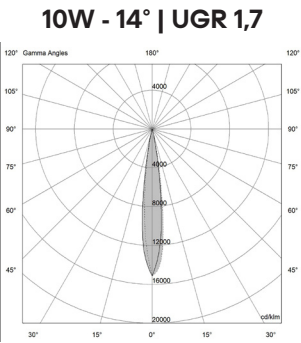

H (m)	D (m)	Eav (lx)
1	0.24	3985
2	0.49	996
3	0.73	443
4	0.98	249
5	1.22	159

Total lumen output
410 lm

Efficacy
50 lm/W

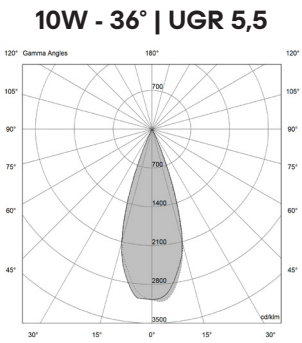


H (m)	D (m)	Eav (lx)
1	0.65	1063
2	1.30	266
3	1.95	118
4	2.60	66
5	3.25	43

Total lumen output
557 lm

Efficacy
63 lm/W

SUGGESTED REMOTE DRIVER

On/off:
CV20-F-500-N



Multifunction (DALI 2, 0/1-10V, PUSH):
CV25-DM-500-N

