
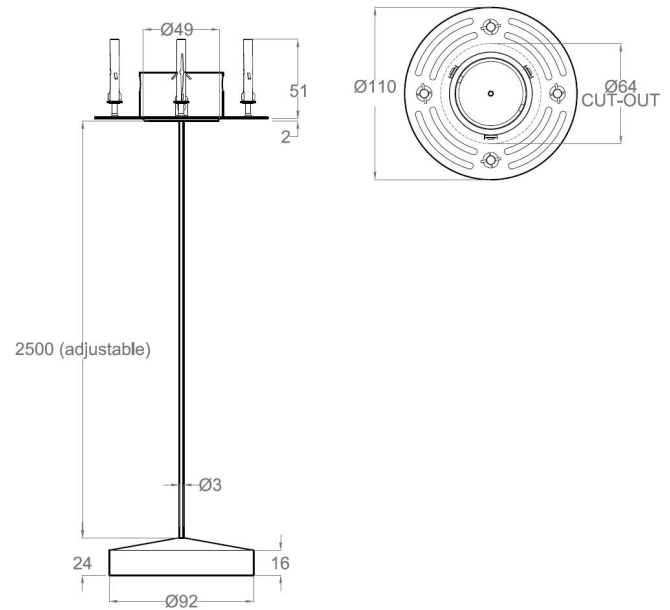


Luna F

Pendant Lighting | IP40 | Class III | Dimmable

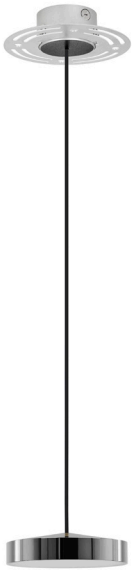

LIGHT SOURCE & OPTIC

Power

6W

Emission

Diffused

Beam Direction

Fixed, Symmetrical

Material

Glass

LED quantity

56

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

Lifetime (Ta 25°)

L70 >54.000 hrs

Output (3000K CRI>90)

584 lm

FIXTURE

Dimensions

Ø 92mm x H 24mm

Material

Brass

Aluminium

Body finishes

PVD Satin Black

PVD Polished Black

PVD Gold Chrome

PVD Satin Gold

PVD Rose gold

PVD Shiny Chrome

Titanium

Dark bronze

Champagne gold

Ceiling canopy finishes

Black (RAL 9005)

White (RAL 9003)

Weight

470gr

Mounting

Semirecessed: cut out: Ø 64mm

Fixing

Fixing frame

ELECTRICAL FEATURES

Power Supply

Constant tension: 24 Vdc

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut


0/1-10 V

Casambi

DALI

PHOTOMETRIC DATA (3000K CRI>90)

6W - 105° | UGR 26

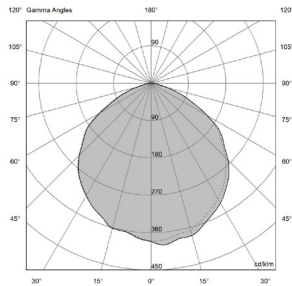

H (m)	D (m)	Eav (lx)
1	2.83	36
2	5.66	9
3	8.49	4
4	11.32	2
5	14.15	1


Total lumen output
363 lm

Efficacy
60 lm/W

INSTALLATION ACCESSORIES

Fixing rame (A01636.30)


Necessary element: please specify always 1 frame for each Fixture in the purchase order



INSTALLATION TOOL

Hole saw (A00830.H0)


available for easier installation

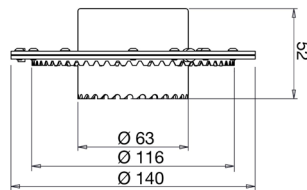

SUGGESTED REMOTE DRIVERS

On/off:


CV20-F-24-N



Ø 60

Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-24-NI



Ø 44

Other options upon request