

LIGHT SOURCE

LED quantity	3
Power max	3 W
Total lumen output (3000K)	3W: 15° - 192 lm 30° - 158 lm 60° - 120 lm Elliptical lens - 153 lm Frosted glass - 97 lm
Efficacy lm/W (3000K)	3W: 15° - 64 lm/W 30° - 53 lm/W 60° - 40 lm/W Elliptical lens - 51 lm/W Frosted glass - 32 lm/W
CRI	>80 - >90
LED Temperature	2200K - 2700K - 3000K - 3000K CRI>90 - 4000K
Average operational life	50.000 hours

OPTIC

Material	PMMA lens/ glass cover
Available optics	15° - 30° - 60° - elliptical lens - frosted glass
Beam direction	Adjustable +/-160°, rotating +/- 355°
Flux symmetry	Symmetrical, asymmetrical

FIXTURE

Material	Aluminum
Available finishes	Hard coat anodized: 3 - Gray 4 - Black Powder coat: 4A- Anthracite gray MF- Moka VB- Yellow olive
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Applique

ELECTRICAL FEATURES

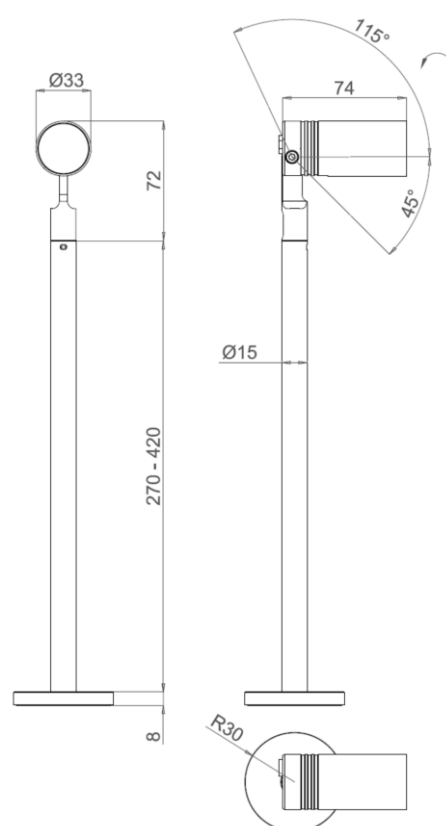
Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 350mA
Class	III

MECHANICAL FEATURES

Dimensions (body)	Ø33 x 74 x 350-500 mm
Weight	350 gr - 420 gr
Installation	Wall, ceiling, floor mounting
Cut-out	-
Use	Outdoor

ACCESSORIES

Visors	Low glare visor, low glare snoot
Filters	-
Fixing system	Stainless steel stake, Anchor for concrete








A00846._0 Low glare visor



A00847._0 Low glare snoot

PHOTOMETRIC DATA

15° Lens – 3W	30° Lens – 3W	60° Lens – 3W	Elliptical lens – 3W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>15°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.41</td><td>1003</td><td>623</td></tr> <tr> <td><u>2.00</u></td><td>0.83</td><td>251</td><td>156</td></tr> <tr> <td><u>3.00</u></td><td>1.24</td><td>111</td><td>69</td></tr> <tr> <td><u>4.00</u></td><td>1.65</td><td>63</td><td>39</td></tr> <tr> <td><u>5.00</u></td><td>2.07</td><td>40</td><td>25</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	15°				<u>1.00</u>	0.41	1003	623	<u>2.00</u>	0.83	251	156	<u>3.00</u>	1.24	111	69	<u>4.00</u>	1.65	63	39	<u>5.00</u>	2.07	40	25	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>30°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.42</td><td>712</td><td>441</td></tr> <tr> <td><u>2.00</u></td><td>0.84</td><td>178</td><td>110</td></tr> <tr> <td><u>3.00</u></td><td>1.26</td><td>79</td><td>49</td></tr> <tr> <td><u>4.00</u></td><td>1.68</td><td>45</td><td>28</td></tr> <tr> <td><u>5.00</u></td><td>2.10</td><td>28</td><td>18</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	30°				<u>1.00</u>	0.42	712	441	<u>2.00</u>	0.84	178	110	<u>3.00</u>	1.26	79	49	<u>4.00</u>	1.68	45	28	<u>5.00</u>	2.10	28	18	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>60°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.59</td><td>323</td><td>194</td></tr> <tr> <td><u>2.00</u></td><td>1.18</td><td>81</td><td>48</td></tr> <tr> <td><u>3.00</u></td><td>1.77</td><td>36</td><td>22</td></tr> <tr> <td><u>4.00</u></td><td>2.35</td><td>20</td><td>12</td></tr> <tr> <td><u>5.00</u></td><td>2.94</td><td>13</td><td>8</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	60°				<u>1.00</u>	0.59	323	194	<u>2.00</u>	1.18	81	48	<u>3.00</u>	1.77	36	22	<u>4.00</u>	2.35	20	12	<u>5.00</u>	2.94	13	8	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>20x30</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.40</td><td>582</td><td>358</td></tr> <tr> <td><u>2.00</u></td><td>0.79</td><td>146</td><td>90</td></tr> <tr> <td><u>3.00</u></td><td>1.19</td><td>65</td><td>40</td></tr> <tr> <td><u>4.00</u></td><td>1.58</td><td>36</td><td>22</td></tr> <tr> <td><u>5.00</u></td><td>1.98</td><td>23</td><td>14</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	20x30				<u>1.00</u>	0.40	582	358	<u>2.00</u>	0.79	146	90	<u>3.00</u>	1.19	65	40	<u>4.00</u>	1.58	36	22	<u>5.00</u>	1.98	23	14
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
15°																																																																																																																			
<u>1.00</u>	0.41	1003	623																																																																																																																
<u>2.00</u>	0.83	251	156																																																																																																																
<u>3.00</u>	1.24	111	69																																																																																																																
<u>4.00</u>	1.65	63	39																																																																																																																
<u>5.00</u>	2.07	40	25																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
30°																																																																																																																			
<u>1.00</u>	0.42	712	441																																																																																																																
<u>2.00</u>	0.84	178	110																																																																																																																
<u>3.00</u>	1.26	79	49																																																																																																																
<u>4.00</u>	1.68	45	28																																																																																																																
<u>5.00</u>	2.10	28	18																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
60°																																																																																																																			
<u>1.00</u>	0.59	323	194																																																																																																																
<u>2.00</u>	1.18	81	48																																																																																																																
<u>3.00</u>	1.77	36	22																																																																																																																
<u>4.00</u>	2.35	20	12																																																																																																																
<u>5.00</u>	2.94	13	8																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
20x30																																																																																																																			
<u>1.00</u>	0.40	582	358																																																																																																																
<u>2.00</u>	0.79	146	90																																																																																																																
<u>3.00</u>	1.19	65	40																																																																																																																
<u>4.00</u>	1.58	36	22																																																																																																																
<u>5.00</u>	1.98	23	14																																																																																																																
Frosted glass – 3W																																																																																																																			
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>Frost. glass</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.73</td><td>143</td><td>83</td></tr> <tr> <td><u>2.00</u></td><td>1.46</td><td>36</td><td>21</td></tr> <tr> <td><u>3.00</u></td><td>2.20</td><td>16</td><td>9</td></tr> <tr> <td><u>4.00</u></td><td>2.93</td><td>9</td><td>5</td></tr> <tr> <td><u>5.00</u></td><td>3.66</td><td>6</td><td>3</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	Frost. glass				<u>1.00</u>	0.73	143	83	<u>2.00</u>	1.46	36	21	<u>3.00</u>	2.20	16	9	<u>4.00</u>	2.93	9	5	<u>5.00</u>	3.66	6	3																																																																																							
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
Frost. glass																																																																																																																			
<u>1.00</u>	0.73	143	83																																																																																																																
<u>2.00</u>	1.46	36	21																																																																																																																
<u>3.00</u>	2.20	16	9																																																																																																																
<u>4.00</u>	2.93	9	5																																																																																																																
<u>5.00</u>	3.66	6	3																																																																																																																

NOTES

Provided with 200 cm neoprene