

LIGHT SOURCE

LED quantity	3	
Power max	3 W	
Total lumen output (3000K)	3W: 10° - 354 lm 30° - 372 lm 60° - 288 lm	6W: 10° - 485 lm 30° - 498 lm 60° - 382 lm
Efficacy lm/W (3000K)	3W: 10° - 118 lm/W 30° - 124 lm/W 60° - 96 lm/W	6W: 10° - 81 lm/W 30° - 83 lm/W 60° - 64 lm/W
CRI	>80	
LED Temperature	2200K - 2700K - 3000K - 4000K - RGB	
Average operational life	50.000 hours	

OPTIC

Material	PMMA
Available optics	10° - 30° - 60°
Beam direction	Fixed
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum, Stainless Steel
Available finishes	Hard coat anodized: 3 - Gray 4 - Black As per material: 6 - Stainless steel AISI 316L
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

ELECTRICAL FEATURES



Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 350mA - 500mA
Class	III

MECHANICAL FEATURES


Dimensions	Ø80 x 65 mm
Weight	400 gr
Installation	Wall, ceiling, floor recessed
Cut-out	Ø68 mm (recessed box A00290.40)
Use	Outdoor

ACCESSORIES

Visors	-
Filters	-
Box/ Frame	Recessed box
Fixing system	-



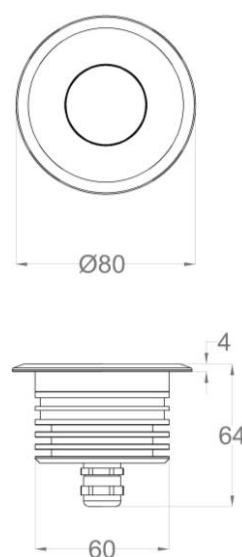


A00290.40 Recessed box



A00251.40 Recessed box

PHOTOMETRIC DATA

10° Lens – 6W	30° Lens – 6W	60° Lens – 6W																																																																																					
																																																																																							
<table><tr><th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr><tr><td colspan="4">10°</td></tr><tr><td><u>1.00</u></td><td>0.25</td><td>4716</td><td>2975</td></tr><tr><td><u>2.00</u></td><td>0.50</td><td>1179</td><td>744</td></tr><tr><td><u>3.00</u></td><td>0.75</td><td>524</td><td>331</td></tr><tr><td><u>4.00</u></td><td>1.00</td><td>295</td><td>186</td></tr><tr><td><u>5.00</u></td><td>1.24</td><td>189</td><td>119</td></tr></table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	10°				<u>1.00</u>	0.25	4716	2975	<u>2.00</u>	0.50	1179	744	<u>3.00</u>	0.75	524	331	<u>4.00</u>	1.00	295	186	<u>5.00</u>	1.24	189	119	<table><tr><th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr><tr><td colspan="4">30°</td></tr><tr><td><u>1.00</u></td><td>0.48</td><td>1989</td><td>1279</td></tr><tr><td><u>2.00</u></td><td>0.96</td><td>497</td><td>320</td></tr><tr><td><u>3.00</u></td><td>1.44</td><td>221</td><td>142</td></tr><tr><td><u>4.00</u></td><td>1.92</td><td>124</td><td>80</td></tr><tr><td><u>5.00</u></td><td>2.41</td><td>80</td><td>51</td></tr></table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	30°				<u>1.00</u>	0.48	1989	1279	<u>2.00</u>	0.96	497	320	<u>3.00</u>	1.44	221	142	<u>4.00</u>	1.92	124	80	<u>5.00</u>	2.41	80	51	<table><tr><th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr><tr><td colspan="4">60°</td></tr><tr><td><u>1.00</u></td><td>0.74</td><td>769</td><td>450</td></tr><tr><td><u>2.00</u></td><td>1.48</td><td>192</td><td>112</td></tr><tr><td><u>3.00</u></td><td>2.21</td><td>85</td><td>50</td></tr><tr><td><u>4.00</u></td><td>2.95</td><td>48</td><td>28</td></tr><tr><td><u>5.00</u></td><td>3.69</td><td>31</td><td>18</td></tr></table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	60°				<u>1.00</u>	0.74	769	450	<u>2.00</u>	1.48	192	112	<u>3.00</u>	2.21	85	50	<u>4.00</u>	2.95	48	28	<u>5.00</u>	3.69	31	18	
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																				
10°																																																																																							
<u>1.00</u>	0.25	4716	2975																																																																																				
<u>2.00</u>	0.50	1179	744																																																																																				
<u>3.00</u>	0.75	524	331																																																																																				
<u>4.00</u>	1.00	295	186																																																																																				
<u>5.00</u>	1.24	189	119																																																																																				
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																				
30°																																																																																							
<u>1.00</u>	0.48	1989	1279																																																																																				
<u>2.00</u>	0.96	497	320																																																																																				
<u>3.00</u>	1.44	221	142																																																																																				
<u>4.00</u>	1.92	124	80																																																																																				
<u>5.00</u>	2.41	80	51																																																																																				
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																				
60°																																																																																							
<u>1.00</u>	0.74	769	450																																																																																				
<u>2.00</u>	1.48	192	112																																																																																				
<u>3.00</u>	2.21	85	50																																																																																				
<u>4.00</u>	2.95	48	28																																																																																				
<u>5.00</u>	3.69	31	18																																																																																				

NOTES

Provided with 100 cm neoprene cable.