
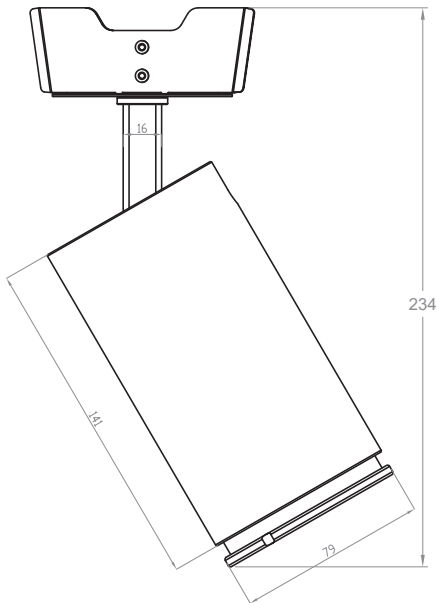


Aurora Zoom 3000 mP

Projectors | IP67 | Class II | Dimmable

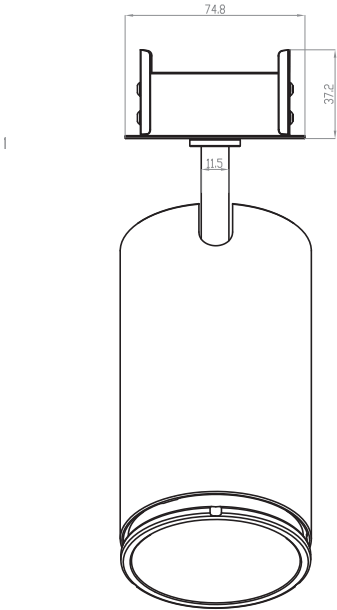

LIGHT SOURCE & OPTIC

Power
25W

Lens
Zoom 8°/45°

Beam Direction
Adjustable:
Tilting +/-103°, rotating +/-355°,
Symmetrical

Material
PMMA + glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80
3000K CRI>80
3000K CRI>90
4000K CRI>90

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 61.5mm x H 158 mm (cylinder)

Material
Aluminium

Body finishes
Black
White
All White

Weight
1020gr

Mounting
On Surface

Fixing
Springs
Base for inner connection

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Main Voltage:
700 mA

Driver requirement
Builtin

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Aurora Zoom 3000 mP


PHOTOMETRIC DATA (3000K CRI>90)

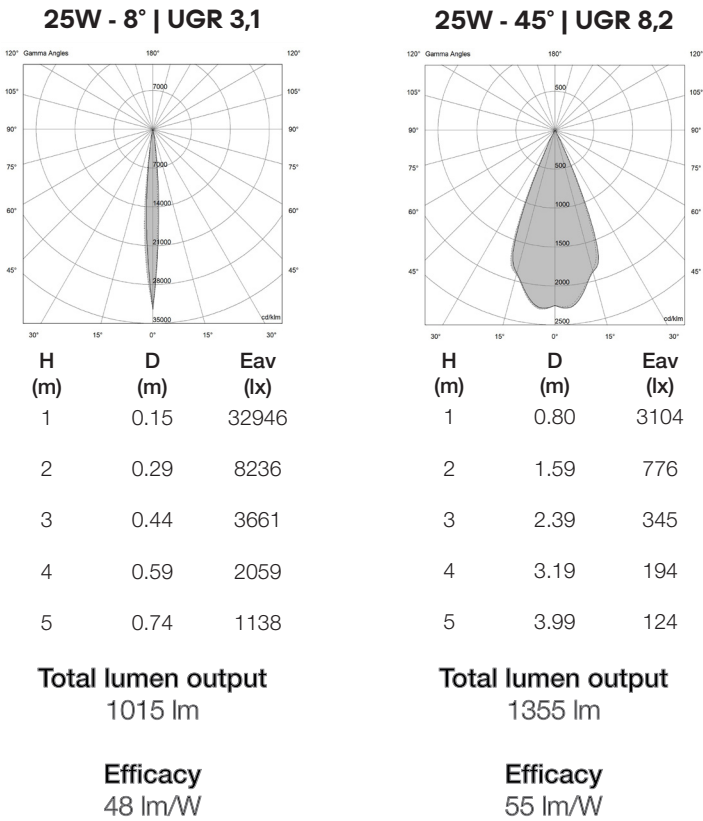

Aurora Zoom 3000 mP

SUGGESTED REMOTE DRIVER

On/off:
CV50-F-700-N



Multifunction (DALI 2, 0/1-10V, PUSH):
CV70-DM-700-N

