

LIGHT SOURCE

LED quantity	1
Power max	6 W – 9W
Total lumen output (3000K)	461 lm - 594 lm
Efficacy lm/W (3000K)	77 lm/W - 66 lm/W
LOR (3000K)	83% - 80%
CRI	>80
LED Temperature (K)	2700 K – 3000 K – 4000 K – 5000 K
Average operational life	50.000 hours

OPTIC

Material	PMMA lens
Available optics	3°-10°-30°
Beam direction	Adjustable
Flux symmetry	Symmetrical
Accessories	Low glare visor (A00519.60)

LED FIXTURE

Material	AISI 316L Stainless steel
Finish	AISI 316L Stainless steel
Available finishes	AISI 316L
IP Rate	IP68
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 500mA – 700mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø50 x 76
Weight	380 gr
Mounting	Wall, Ceiling, Floor mounting
Cut-out (mm)	-
Use	Immersion

NOTES

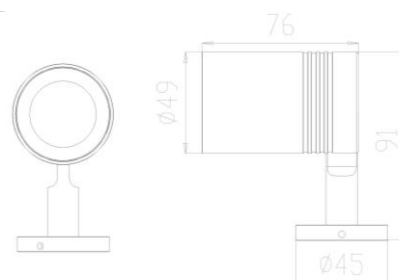

9W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
10°			
1.00	0.21	8339	5186
2.00	0.42	2085	1296
3.00	0.63	927	576
4.00	0.84	521	324
5.00	1.05	334	207