







Micro


 350mA Lumen Output 3000K	3W 350mA - 270 lm
15° Lens	7A0833._._.-UL
30° Lens	760833._._.-UL
60° Lens	750833._._.-UL
Frosted Glass	710832._._.-UL
Elliptical Lens	770833._._.-UL









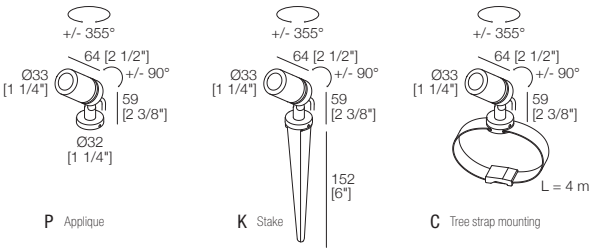


 24V Lumen Output 3000K	3W 24Vdc - 270 lm
15° Lens	7A4716._._.-UL
30° Lens	764716._._.-UL
60° Lens	754716._._.-UL
Frosted Glass	714716._._.-UL
Elliptical Lens	774716._._.-UL

Micro with hex louver

 350mA Lumen Output 3000K	3W 350mA - 190 lm
15° Lens	7A4151._._.-UL
30° Lens	764151._._.-UL
60° Lens	754151._._.-UL
Frosted Glass	714151._._.-UL
Elliptical Lens	774151._._.-UL

 24V Lumen Output 3000K	3W 24Vdc - 190 lm
15° Lens	7A4717._._.-UL
30° Lens	764717._._.-UL
60° Lens	754717._._.-UL
Frosted Glass	714717._._.-UL
Elliptical Lens	774717._._.-UL







FINISH	CCT	FIXING
 4 Black	 U 2200K	 P Applique
 E Massive Brass	 Y 2700K	 K Stake
 3 Gray	 6 3000K	 C Tree strap mounting
	 W 3000K CRI > 90	
	 9 4000K	



SUGGESTED DRIVERS (not included)

350mA	CC36-R-350-NF	p. 244
24Vdc	CV60-R-24-M	p. 248

ACCESSORIES

 35 [1 3/8"]	 35 [1 3/8"]
 Ø39 [1 1/2"]	 Ø39 [1 1/2"]
9 [3/8"]	9 [3/8"]
Low glare visor A00846._0	Low glare visor A00847._0

EXAMPLE CODE COMPOSITION

123456._._.-UL
FIXING
CCT
FINISH