


Mini Tini B Micro

Low Voltage Track Projectors

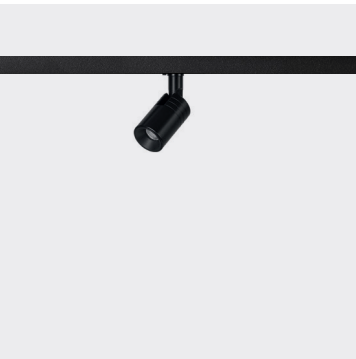


IP40

24V
48V

32 g

2

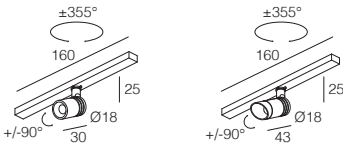

Mini Tini B Micro
with visor

Mini Tini B Micro

24-48Vdc <small>Lumen Output 3000K cRI > 90</small>	2W 24-48Vdc - 80 lm	3W 24-48Vdc - 110 lm
10° Lens	734787. _ _ _	734788. _ _ _
25° Lens	7G4787. _ _ _	7G4788. _ _ _
40° Lens	744787. _ _ _	744788. _ _ _
60° Lens	754787. _ _ _	754788. _ _ _

FINISH	CCT	DIMMING
● H Black	● U 2200K	F ON-OFF
● B Dark Bronze	● X 2700K cRI > 90	D DALI
○ 7 White	● W 3000K cRI > 90	M Broadcast
	● K 3500K cRI > 90	
	● D 4000K cRI > 90	
	● 1 5000K	

Mini Tini B Micro with visor

24-48Vdc <small>Lumen Output 3000K cRI > 90</small>	2W 24-48Vdc - 65 lm	3W 24-48Vdc - 90 lm
10° Lens	734913. _ _ _	734914. _ _ _
25° Lens	7G4913. _ _ _	7G4914. _ _ _
40° Lens	744913. _ _ _	744914. _ _ _
60° Lens	754913. _ _ _	754914. _ _ _



SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 707
48Vdc	CV150-F-48-N	p. 709

TRACKS ACCESSORIES

Micro track and accessories	p. 684
-----------------------------	--------

EXAMPLE CODE COMPOSITION

