
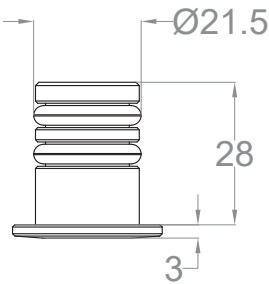


# Nano Tini i

Projectors | IP40 | Class III | Dimmable



## LIGHT SOURCE & OPTIC

- Power**  
1W
- Lens**  
20°/30°/50°
- Beam Direction**  
Adjustable: 15°/-25°  
Symmetrical
- Material**  
PMMA
- LED quantity**  
1
- Binning**  
2 MacAdam steps
- Color temperature & quality**  
2200K CRI>80  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90
- Lifetime**  
(L90) >60.000 hrs

## FIXTURE


- Dimensions**  
Ø 13mm x H 13mm (cylinder)
- Material**  
Aluminium
- Body finishes**  
Black  
Massive Brass  
Gold Chrome  
Grey  
Shiny Chrome  
White
- Weight**  
8gr
- Mounting**  
Recessed
- Fixing**  
Ring Nut  
Magnetic  
Applique  
Screw Base  
Jack
- Working temperature**  
-20° / +40°

## ELECTRICAL FEATURES

- Power supply**  
Main Voltage:  
350 mA
- Driver requirement**  
Remote (not included)
- Control**  
On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

# Nano Tini i

## PHOTOMETRIC DATA (3000K CRI>90)

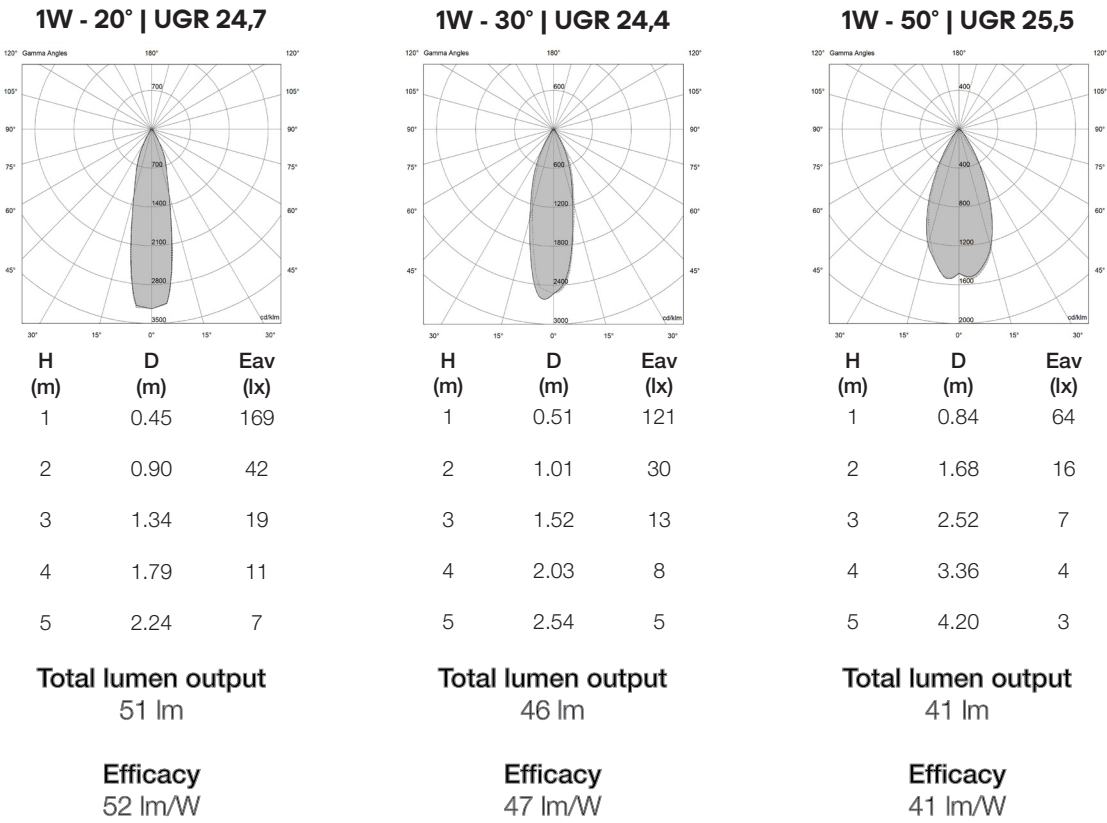


# Nano Tini i

INTERCHANGEABLE ACCESSORIES

INSTALLATION ACCESSORIES

SUGGESTED REMOTE DRIVER

**On/off:**  
CV20-F-350-N



 Ø 55

**Multifunction (DALI 2, 0/1-10V, PUSH):**  
CV25-DM-350-N



 Ø 55