

LIGHT SOURCE

LED quantity	1
Power max	4 W
Total lumen output (3000K)	4W: 60° - 361 lm
Efficacy lm/W (3000K)	4W: 60° - 90 lm/W
CRI	>80 – >90
LED Temperature	2700K – 3000K – 3000K CRI>90 – 4000K – 5000K
Average operational life	50.000 hours

OPTIC

Material	Optical Glass
Available optics	60°
Beam direction	Adjustable +/-170°, rotating +/-355°
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum
Available finishes	Hard coat anodized: 3 - Gray 4 - Black Z - Champagne Gold Powder coated: 7 - White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Ring nut

ELECTRICAL FEATURES


Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 350mA
Class	III

MECHANICAL FEATURES

Dimensions	60 x 18 x L mm
Weight	60 gr
Installation	Wall, ceiling, floor mounting
Cut-out	Ø13,5 mm
Use	Indoor


ACCESSORIES

Visors	Visor included in <i>Operaprima with snoot</i> version
Filters	-
Box/ Frame	-
Fixing system	-

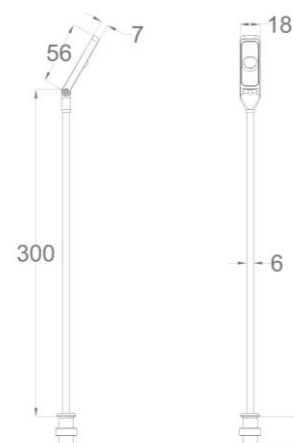

PHOTOMETRIC DATA

60° Lens – 4W

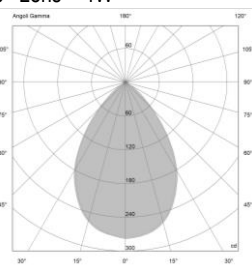

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
------	------	-----------------------	----------------------

60°

<u>1.00</u>	1.43	278	131
-------------	------	-----	-----

<u>2.00</u>	2.85	70	33
-------------	------	----	----

<u>3.00</u>	4.28	31	15
-------------	------	----	----

<u>4.00</u>	5.71	17	8
-------------	------	----	---

<u>5.00</u>	7.13	11	5
-------------	------	----	---

NOTES