
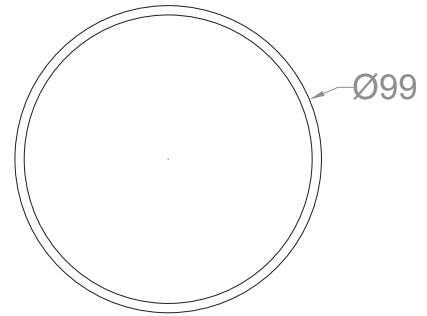


POIS 100

Surface lights | IP40 | Class III | Dimmable

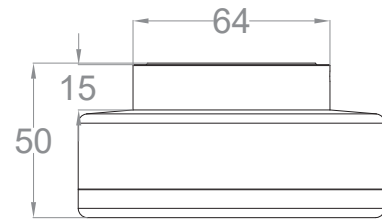

LIGHT SOURCE & OPTIC

Power

6W

Lens

Diffuse emission

Beam Direction

Fixed, Symmetrical

Material

Glass

LED quantity

56

Binning

2 MacAdam steps

Color temperature & quality

2700K
3000K CRI>80
3000K CRI>90
4000K

Lifetime

(L70) >54.000 hrs

FIXTURE

Dimensions

Ø 99mm x H 50mm

Material

Aluminium

Body finishes

Black (RAL 9005)
Intense Bronze
Gold
Agate Gray (RAL 7038)
OysterWhite (RAL1013)
White (RAL 9003)

Weight

510gr

Mounting

Surface Mounting

Fixing

Springs

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
24Vdc
Typical Vf= 24V

Driver requirement


Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

PHOTOMETRIC DATA (3000K CRI>90)

6W | UGR 26.8

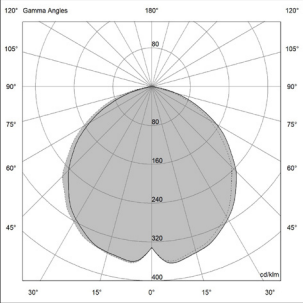

H (m)	D (m)	Eav (lx)
1	1.80	69
2	3.60	17
3	5.39	8
4	7.19	4
5	8.99	3

Total lumen output
280 lm


Efficacy
46 lm/W

POIS 100

SUGGESTED REMOTE DRIVERS

On/off:


CV20-F-24-N



Ø 60

Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-24-NI



Ø 44

Other options upon request