

LIGHT SOURCE

LED quantity	1
Power max	6 W
Total lumen output (3000K)	6W: 30° Asymmetric - 104 lm
Efficacy lm/W (3000K)	6W: 30° Asymmetric - 17 lm/W
CRI	>80 - >90
LED Temperature	2700K - 3000K – 3000K CRI>90 – 3500K - 4000K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	30° Asymmetric
Beam direction	Fixed
Flux symmetry	Asymmetrical

FIXTURE

Material	Aluminum, Stainless Steel
Available finishes	Hard coat anodized: 3 - Gray 4 - Black As per material: 6 - Stainless steel AISI 316L
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

ELECTRICAL FEATURES



Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 500mA
Class	III

MECHANICAL FEATURES

Dimensions	Ø60 x 89 mm
Weight	325 gr
Installation	Wall, floor recessed
Cut-out	Ø55 mm (recessed box A00489.40)
Use	Outdoor


ACCESSORIES

Visors	-
Filters	-
Box/ Frame	Recessed box
Fixing system	-

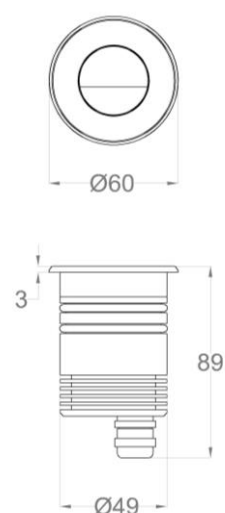

A00489.40 Recessed box

PHOTOMETRIC DATA

30° Asymmetric Lens – 6W			
			
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
30°			
<u>1.00</u>	0.34	564	370
<u>2.00</u>	0.67	141	93
<u>3.00</u>	1.01	63	41
<u>4.00</u>	1.35	35	23
<u>5.00</u>	1.68	23	15

NOTES

Recessed luminaire with asymmetric emission,equipped with thin flange and eyelid, designed to control the luminous efficiency, ensuring excellent visual comfort.

Provided with 100 cm neoprene cable.