




Projectors


● Plug&Play System

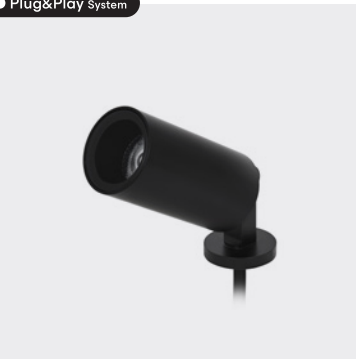


P Applique




U Side exit cable




K Stake



C Tree strap mounting

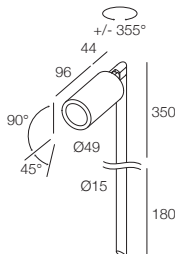

A Stake H350

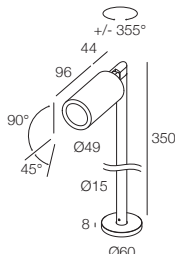

B Bollard H350

500 / 700mA	9W	13W
Lumen Output 3000K	500mA - 770 lm	700mA - 1000 lm
14° Lens	7Q4552. _ _ _ _	7Q4565. _ _ _ _
18° Lens	784552. _ _ _ _	784565. _ _ _ _
24° Lens	7G4552. _ _ _ _	7G4565. _ _ _ _
33° Lens	7E4552. _ _ _ _	7E4565. _ _ _ _
52° Lens	754552. _ _ _ _	754565. _ _ _ _

24V	9,5W	13W
Lumen Output 3000K	24Vdc - 770 lm	24Vdc - 1000 lm
14° Lens	7Q4720. _ _ _ _	7Q4721. _ _ _ _
18° Lens	784720. _ _ _ _	784721. _ _ _ _
24° Lens	7G4720. _ _ _ _	7G4721. _ _ _ _
33° Lens	7E4720. _ _ _ _	7E4721. _ _ _ _
52° Lens	754720. _ _ _ _	754721. _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			




SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 704
700mA	CC14-F-700-PI	p. 705
24Vdc	CV30-F-24-PI	p. 708

ACCESSORIES




INTERCHANGEABLE ACCESSORIES
p. 676



Low glare visor
A00519_0



Low glare snoot
A00848_0



Watertight connector p. 682
A00387.40

123456.	FIXING
	OPTICAL FILTER
	DECORATIVE RING
	CCT
	FINISH