
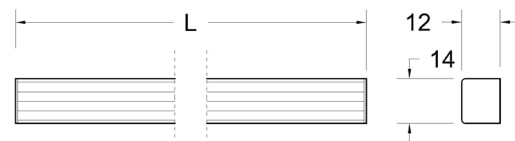



Armonia linear lens

Linear System | IP40 | Class III | Dimmable

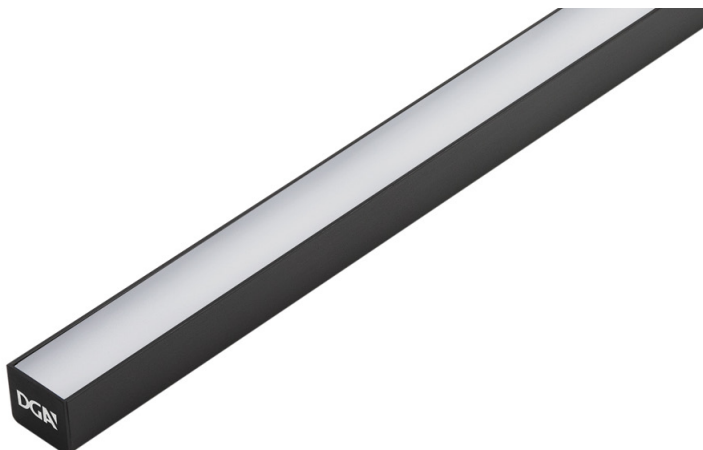

Integrated Fixing*

Magnetic fixing Double sided tape



LIGHT SOURCE & OPTIC

Power

8W
12W
16W
19W
23W

Lens

Transparent Cover, (6%)
Opal Cover (25%)
Black Ghost Cover (80%)

Beam Direction

Fixed, Asymmetrical

Material

PMM

LED quantity

233

Binning

2 MacAdam step

Color temperature & quality

2200K
2500K
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90

Lifetime

L85 >95.000 hrs

FIXTURE

Dimensions

L 14mm x H 12mm

004	007	010	013	016	019	022	025	028	031	WHITE
034	037	040	043	046	049	052	055	058	061	
064	067	070	073	076	079	082	085	088	091	
094	097	100	103	106	109	112	115	118	121	
124	127	130	133	136	139	142	145	148	151	
154	157	160	163	166	169	172	175	178	181	
184	187	190	193	196	199	202	205	208	211	
214	217	220	223	226	229	232	235	238	241	
244	247	250	253	256	259	262	265	268	271	
274	277	280	283	286	289	292	295	298		
006	010	014	018	022	026	030	034	038	042	TUNABLE WHITE
046	050	054	058	062	066	070	074	078	082	
086	090	094	098	102	106	110	114	118	122	
126	130	134	138	142	146	150	154	158	162	
166	170	174	178	182	186	190	194	198	202	
206	210	214	218	222	226	230	234	238	242	
246	250	254	258	262	266	270	274	278	282	
286	290	294	298							

Material
Aluminum

Body finishes

Black
Gray

Weight

130gr/m

Mounting

On surface

End caps

Aluminum
Transparent

Fixing*

Magnetic fixing
Double sided tape
Without fixing (see accessories)

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Cable exit

Cap exit

In&Out cap exit

Left side exit

In&Out side exit

Right side exit

Back exit


Back in&out exit



Armonia linear lens

PHOTOMETRIC DATA (3000K CRI>90-Opal Cover)

8W/m - 103° | UGR 24

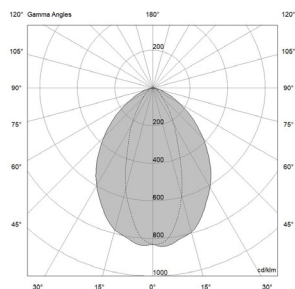


H (m)	D (m)	Eav (lx)
1	2.74	22
2	5.49	5
3	8.23	2
4	10.98	1
5	13.72	1

Total lumen output
616 lm

Efficacy
77 lm/W

12W/m - 103° | UGR 25

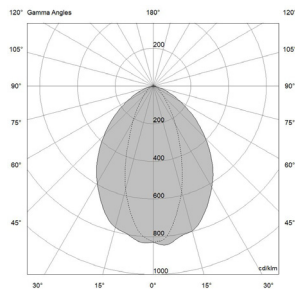


H (m)	D (m)	Eav (lx)
1	2.74	36
2	5.49	9
3	8.23	4
4	10.98	2
5	13.72	1

Total lumen output
1000 lm

Efficacy
83 lm/W

16W/m - 103° | UGR 26

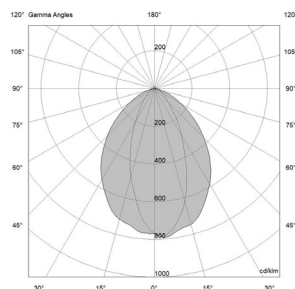


H (m)	D (m)	Eav (lx)
1	2.75	45
2	5.50	11
3	8.24	5
4	10.99	3
5	13.74	2

Total lumen output
1266 lm

Efficacy
79 lm/W

19W/m - 103° | UGR 27

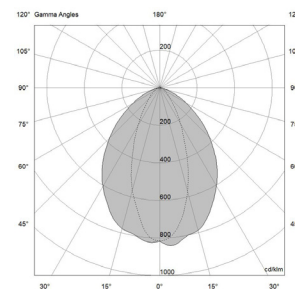


H (m)	D (m)	Eav (lx)
1	2.76	55
2	5.53	14
3	8.29	6
4	11.06	3
5	13.82	2

Total lumen output
1564 lm

Efficacy
82 lm/W

23W/m - 103° | UGR 28

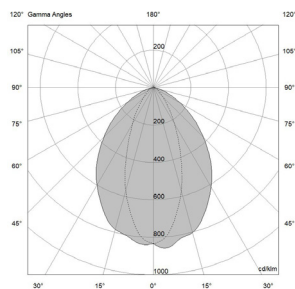

H (m)	D (m)	Eav (lx)
1	2.73	66
2	5.45	17
3	8.18	7
4	10.91	4
5	13.64	3

Total lumen output
1838 lm


Efficacy
80 lm/W

Armonia linear lens

INSTALLATION ACCESSORIES


Magnetic brackets

Only for Armonia without fixing

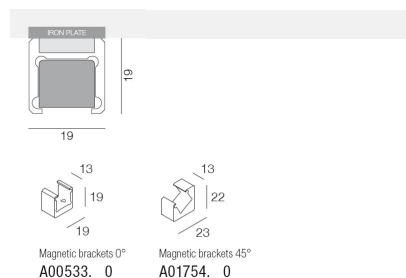


Brackets and screws

Only for Armonia without fixing

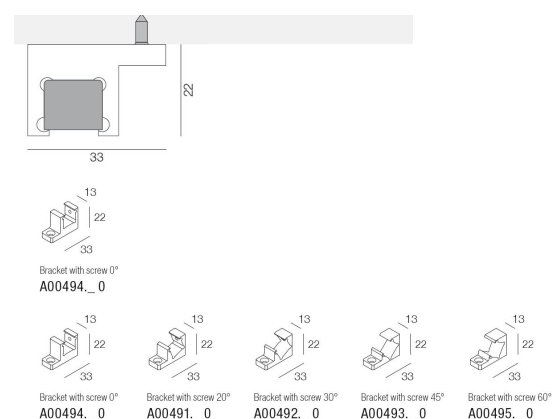

Mounting clips


Only for Armonia without fixing

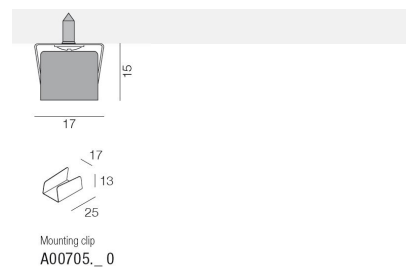

SUGGESTED REMOTE DRIVERS


On/Off :

CV70-F-24-N

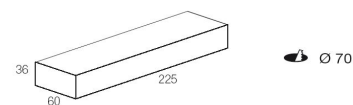

Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI



Other options upon request