


**Integrated Fixing\***

Magnetic fixing Double sided tape

**LIGHT SOURCE & OPTIC****Power**

8W  
12W  
16W  
19W  
23W

**Lens**

Transparent Cover, (6%)  
Opal Cover (25%)  
Black Ghost Cover (80%)

**Beam Direction**

Fixed, Asymmetrical

**Material**

PMM

**LED quantity**

233

**Binning**

2 MacAdam step

**Color temperature & quality**

2200K  
2500K  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90

**Lifetime**

L85 >95.000 hrs

**FIXTURE****Dimensions**

L 14mm x H 12mm

004	007	010	013	016	019	022	025	028	031
034	037	040	043	046	049	052	055	058	061
064	067	070	073	076	079	082	085	088	091
094	097	100	103	106	109	112	115	118	121
124	127	130	133	136	139	142	145	148	151
154	157	160	163	166	169	172	175	178	181
184	187	190	193	196	199	202	205	208	211
214	217	220	223	226	229	232	235	238	241
244	247	250	253	256	259	262	265	268	271
274	277	280	283	286	289	292	295	298	

**Weight**

200gr/m

**End caps**

Aluminum  
Transparent

**Mounting**

On surface

**Fixing\***

Magnetic fixing  
Double sided tape  
Without fixing (see accessories)

**Working temperature**

-20° / +40°

**ELECTRICAL FEATURES****Power supply**

Constant tension: 24 Vdc

**Driver**

Remote (not included)

**Control**

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

**Cable exit**

Cap exit

In&Out cap exit


Left side exit

In&Out side exit

Right side exit


Back exit

Back in&out exit



## PHOTOMETRIC DATA (3000K CRI&gt;90-Opal Cover)

## 8W/m - 103° | UGR 25




H (m)	D (m)	Eav (lx)
1	2.74	22
2	5.49	5
3	8.23	2
4	10.98	1
5	13.72	1

**Total lumen output**  
416 lm

**Efficacy**  
52 lm/W

## 12W/m - 103° | UGR 27




H (m)	D (m)	Eav (lx)
1	2.74	36
2	5.49	9
3	8.23	4
4	10.98	2
5	13.72	1

**Total lumen output**  
668 lm

**Efficacy**  
56 lm/W

## 16W/m - 103° | UGR 28




H (m)	D (m)	Eav (lx)
1	2.75	45
2	5.50	11
3	8.24	5
4	10.99	3
5	13.74	2

**Total lumen output**  
866 lm

**Efficacy**  
54 lm/W

## 19W/m - 103° | UGR 28




H (m)	D (m)	Eav (lx)
1	2.76	55
2	5.53	14
3	8.29	6
4	11.06	3
5	13.82	2

**Total lumen output**  
1044 lm

**Efficacy**  
55 lm/W

## 23W/m - 103° | UGR 28




H (m)	D (m)	Eav (lx)
1	2.73	66
2	5.45	17
3	8.18	7
4	10.91	4
5	13.64	3

**Total lumen output**  
1218 lm


**Efficacy**  
53 lm/W

INSTALLATION ACCESSORIES


Magnetic brackets  
Only for Armonia without fixing

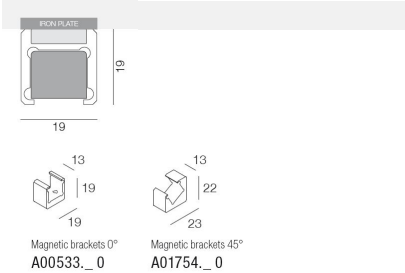

Brackets and screws  
Only for Armonia without fixing

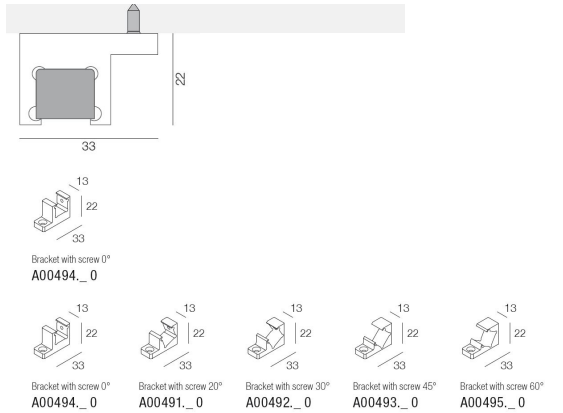


Mounting clips  
Only for Armonia without fixing

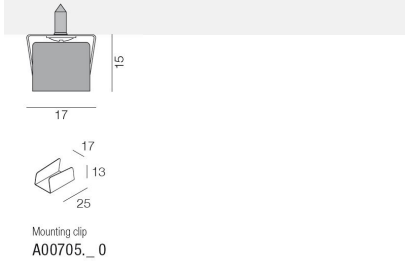

SUGGESTED REMOTE DRIVERS

On/Off :  
CV70-F-24-N



Multifunction (DALI 2, 0/1-10V, PUSH):  
CV75-DM-24-NI



Other options upon request