


# Aurora Zoom 1500 mP

Track and surface zoom projectors | IP40 | Class III | Dimmable

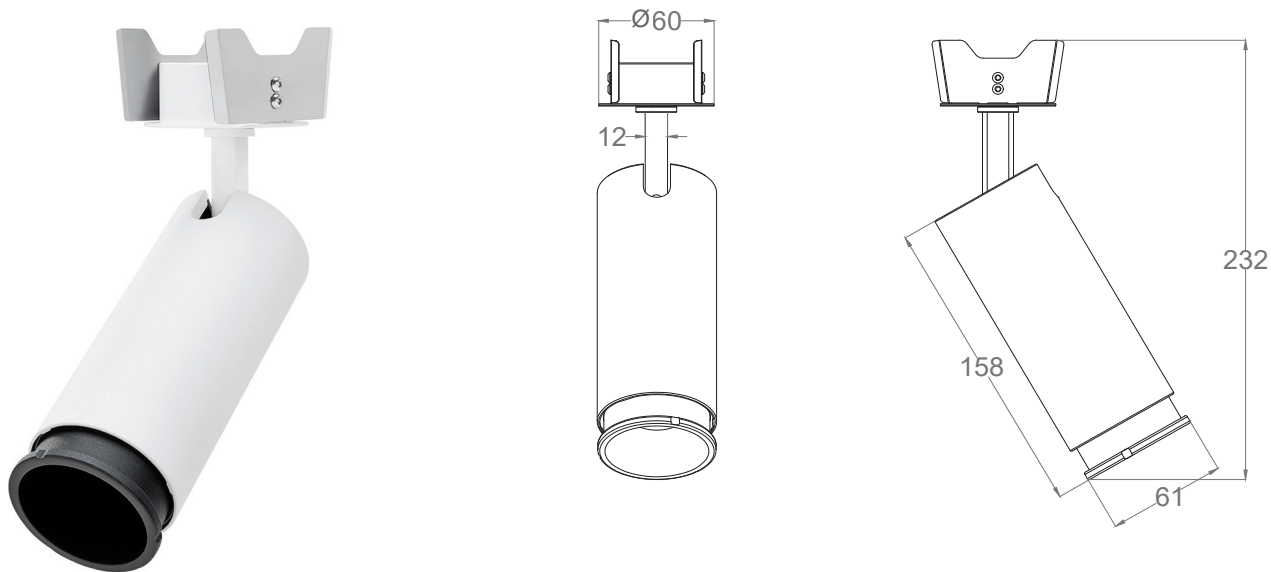

## LIGHT SOURCE & OPTIC

- Power**  
15W
- Lens**  
Zoom 9°>40°
- Beam Direction**  
Adjustable:  
Tilting +/-90°, rotating +/-355°,  
Symmetrical
- Material**  
Glass
- LED quantity**  
1
- Binning**  
2 MacAdam steps
- Color temperature & quality**  
2700K CRI>80  
3000K CRI>80/90  
4000K CRI>90
- Lifetime**  
(L90) >60.000 hrs

## FIXTURE


- Dimensions**  
Ø 61mm x H 158 mm (cylinder)
- Material**  
Aluminium
- Body finishes**  
Black (RAL 9005)  
White (RAL 9003)  
All White (RAL 9003)
- Weight**  
690gr
- Mounting**  
Semi-recessed: cut out Ø 52mm
- Fixing**  
Springs
- Working temperature**  
-20° / +40°

## ELECTRICAL FEATURES

- Power supply**  
Constant current:  
400mA
- Driver requirement**  
Remote (not included)
- Control**  
On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

# Aurora Zoom 1500 mP

## PHOTOMETRIC DATA (3000K CRI>80)

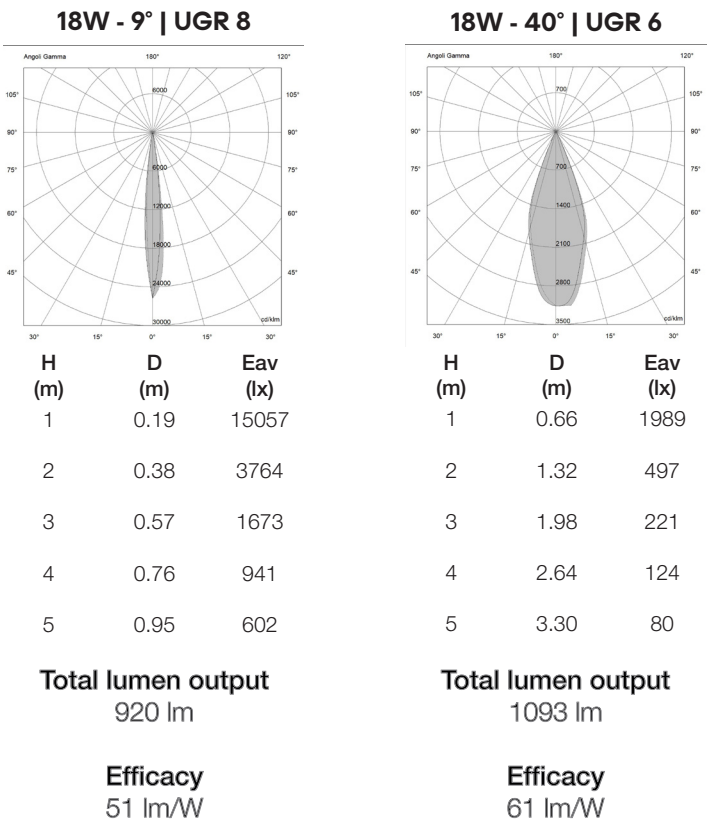


# Aurora Zoom 1500 mP


---

## SUGGESTED REMOTE DRIVER

**On/off:**  
CC20-F-400-N



**Multifunction (DALI 2, 0/1-10V, PUSH):**  
CC25-DM-400-N



Other options upon request