
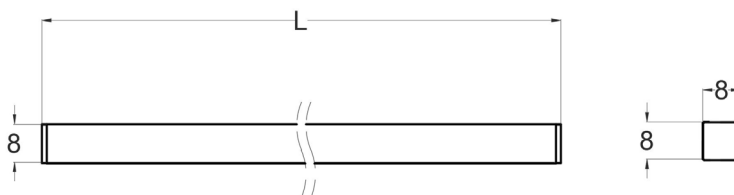


Cometa Q8 IP67

Linear System | IP67 | Class III | Dimmable

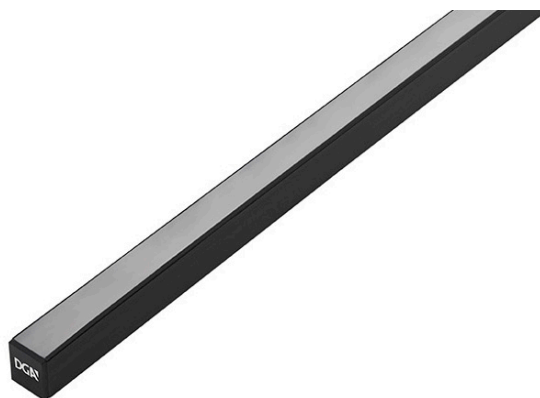

LIGHT SOURCE & OPTIC

Power

8W
12W
16W
19W
23W

Covers

Opal cover

Beam Direction

Fixed, Symmetrical

Material

Polyurethane resin

LED quantity

233

Binning

2 MacAdam steps

Color temperature & quality

2700K CRI>80
3000K CRI>80
3500K CRI>90
4000K CRI>90

Lifetime

L85 >95.000 hrs

FIXTURE

Dimensions

D 8mm x H 8mm x L:

005	008	011	014	017	020	023	026	029	032
035	038	041	044	047	050	053	056	059	062
065	068	071	074	077	080	083	086	089	092
095	098	101	104	107	110	113	116	119	122
125	128	131	134	137	140	143	146	149	152
155	158	161	164	167	170	173	176	179	182
185	188	191	194	197	200				

Material

Aluminium

Body finishes

Black
Gray

Weight

140gr/m

End caps

Aluminium
Transparent

Mounting

On surface

Fixing

Without fixing (see accessories)

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24Vdc

Driver

Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Cable exit

Cap exit



In&Out cap exit



Left side exit



In&Out side exit




Right side exit



Cometa Q8 IP67

PHOTOMETRIC DATA (3000K CRI>80 - Opal cover)

8W/m - 115° | UGR 27

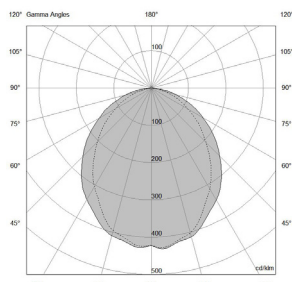


H (m)	D (m)	Eav (lx)
1	3.25	17
2	6.51	4
3	9.76	2
4	13.01	1
5	16.26	1

Total lumen output
400 lm

Efficacy
50 lm/W

12W/m - 115° | UGR 28




H (m)	D (m)	Eav (lx)
1	3.16	27
2	6.31	7
3	9.47	3
4	12.63	2
5	15.79	1

Total lumen output
594 lm

Efficacy
50 lm/W

16W/m - 115° | UGR 29




H (m)	D (m)	Eav (lx)
1	3.10	37
2	6.19	9
3	9.29	4
4	12.39	2
5	15.48	1

Total lumen output
772 lm

Efficacy
48 lm/W

19W/m - 115° | UGR 30




H (m)	D (m)	Eav (lx)
1	3.12	44
2	6.24	11
3	9.36	5
4	12.48	3
5	15.00	2

Total lumen output
936 lm

Efficacy
49 lm/W

23W/m - 115° | UGR 31



H (m)	D (m)	Eav (lx)
1	3.09	56
2	6.17	14
3	9.26	6
4	12.35	3
5	15.43	2


Total lumen output
1170 lm

Efficacy
51 lm/W


Cometa Q8 IP67

INSTALLATION ACCESSORIES


Brackets and screws

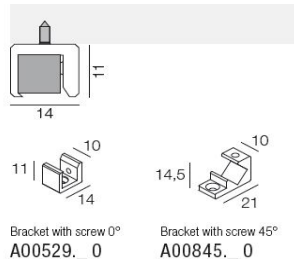

Mounting clips




Watertight connector (A00357.40)



SUGGESTED REMOTE DRIVERS


On/Off :

CV75-F-24-PI



Dimmable (DALI 2):

CV120-D-24-PM



Other options upon request