
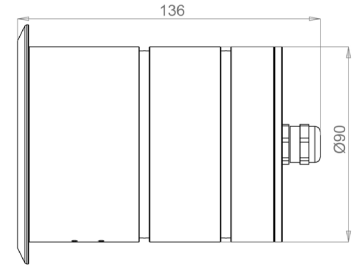


Giove 7S R

Recessed Lighting | IP67 | Class III | Dimmable

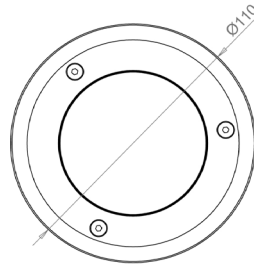

LIGHT SOURCE & OPTIC

Power

7W

Lens

10°

20°

30°

Frosted glass

Beam Direction

+/- 20°, Symmetrical

Material

PMMA

LED quantity

7

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80

4000K CRI>80

Lifetime

(L90) >60.000 hrs

FIXTURE

Dimensions

Ø 110mm x H 136mm

Material

Aluminium

AISI 316L

Body finishes

Black

Gray

Stainless Steel AISI 316L

Weight

1100gr

Mounting

Wall/floor recessed

Fixing

Screws

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:

350mA in series

24Vdc in parallel

Typical Vf= 3V

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V


Casambi

DALI

Giove 7S R

PHOTOMETRIC DATA (3000K CRI>80)

7W - 10° | UGR 14

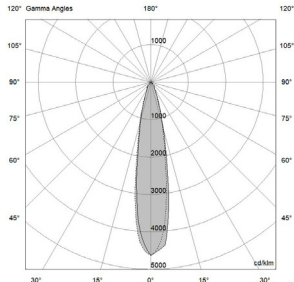


H (m)	D (m)	Eav (lx)
1	0.35	1688
2	0.71	422
3	1.06	188
4	1.42	105
5	1.77	68

Total lumen output
565 lm

Efficacy
83 lm/W

7W - 20° | UGR 15

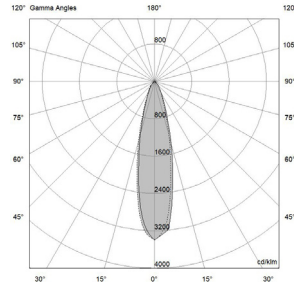


H (m)	D (m)	Eav (lx)
1	0.43	1106
2	0.86	276
3	1.29	123
4	1.72	69
5	2.15	44

Total lumen output
519 lm

Efficacy
75 lm/W

7W - 30° | UGR 16

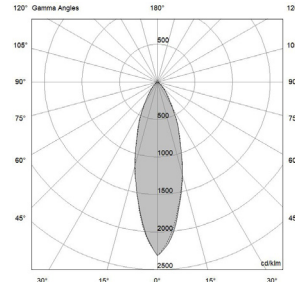


H (m)	D (m)	Eav (lx)
1	0.57	712
2	1.14	178
3	1.70	79
4	2.27	45
5	2.84	28

Total lumen output
532 lm

Efficacy
79 lm/W

FROSTED GLASS | UGR 20

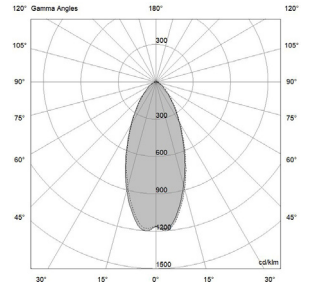

H (m)	D (m)	Eav (lx)
1	0.84	325
2	1.67	81
3	2.51	36
4	3.34	20
5	4.18	13

Total lumen output
479 lm


Efficacy
69 lm/W

Giove 7S R

ACCESSORIES

Plastic recessed box:

A00130.40




SUGGESTED REMOTE DRIVERS

On/Off:

CC14-F-350-PI




CV30-F-24-PI




Multifunction (DALI 2, RIPPLE FREE, AM DIMMING):

CC20-D-350-P



DALI 2:

CV25-D-24-PI



Other options upon request