

Steps light | IP40 | Class III | Dimmable



Lei 01




Lei 02




Lei 03



Spring mounting support

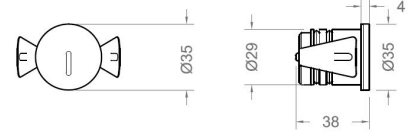


Frame for trimless installation

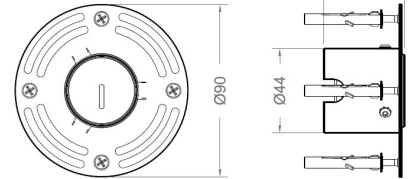

Aluminum recessed box with edge



Aluminum recessed box

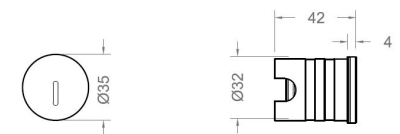**LIGHT SOURCE & OPTIC****Power**1W  
2W**Emission**

45°

**Beam Direction**

Fixed, Asymmetrical

**Material**

Methacrylate

**LED quantity**

1

**Binning**

2 MacAdam Steps

**Color temperature & quality**2200K CRI>80  
2700K CRI>80  
3000K CRI>80  
4000K CRI>80**Lifetime**

(L90) &gt;55.000 hrs

**FIXTURE****Dimensions**

Ø 35mm x H 36mm

**Material**Aluminium  
Stainless Steel AISI 316L**Body finishes**Black  
Gray  
White (RAL 9003)  
Stainless Steel AISI 316L**Weight**

40gr

**Mounting**

Recessed

**Fixing**

See accessories

**Working temperature**

-20° / +40°


**ELECTRICAL FEATURES****Power supply**Constant current:  
350 mA  
500 mA  
Typical Vf= 3V**Driver requirement**

Remote (not included)

**Control**On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

PHOTOMETRIC DATA (3000K CRI>80)

2W - LEI 01 | UGR 34




H (m)	D (m)	Eav (lx)
1	1.81	6
2	3.62	2
3	5.43	1
4	7.24	0
5	9.05	0

Total lumen output  
32 lm

Efficacy  
16 lm/W

2W - LEI 02 | UGR 32




H (m)	D (m)	Eav (lx)
1	0.99	7
2	1.98	2
3	2.97	1
4	3.96	0
5	4.95	0

Total lumen output  
22 lm

Efficacy  
11 lm/W

2W - LEI 03 | UGR 30



H (m)	D (m)	Eav (lx)
1	0.99	3
2	1.98	1
3	2.97	0
4	3.96	0
5	4.95	0

Total lumen output  
8 lm

Efficacy  
4 lm/W

INSTALLATION ACCESSORIES

Aluminum recessed box (A01578.40)




Aluminum recessed box with edge (A01581.\_0)



Spring mounting support (A01579.60)




Frame for trimless installation (A01580.30)




INSTALLATION TOOL

Hole saw (A00832.H0)  
available for easier installation




SUGGESTED REMOTE DRIVERS

**On/Off (RIPPLE FREE):**  
CC20-F-350/500-N



**Multifunction (DALI 2, 0/1...10V, PUSH, RIPPLE FREE, AM DIMMING):**  
CC25-DM-350-N



Other options upon request