

## LIGHT SOURCE

LED quantity	1	
Power max	1 W – 2 W	
Total lumen output (LUI 01-3000K)	1W: 18 lm	2W: 23 lm
Efficacy lm/W (LUI 01-3000K)	1W: 18 lm/W	2W: 12 lm/W
CRI	>80	
LED Temperature	2200K - 2700K – 3000K – 4000K	
Average operational life	50.000 hours	

## OPTIC

Material	PMMA
Available optics	45°
Beam direction	Fixed
Flux symmetry	Asymmetrical

## FIXTURE

Material	Aluminum, Stainless Steel AISI316L
Available body finishes	Hard coat anodized: 3 - Gray 4 - Black As per material: 6 - Stainless steel AISI 316L Powder coated: 7 - White
IP Rate	IP40 - IP52 with housing
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

## ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10, DALI
For emergency lighting	Upon request
Connection	In series at 350mA – 500mA
Class	III



## MECHANICAL FEATURES

Dimensions	Ø38 x 34
Weight	40 gr, 70 gr (AISI316L version)
Installation	Wall recessed
Cut-out	Ø30 with housing Ø33 with spring support
Use	Indoor

## ACCESSORIES

Interchangeable lenses	-
Filters	-
Decorative rings	-
Visors	-
Box/ Frame	Housing (A00102.30) Spring support (A00293.40)
Installation tool	-

## NOTES

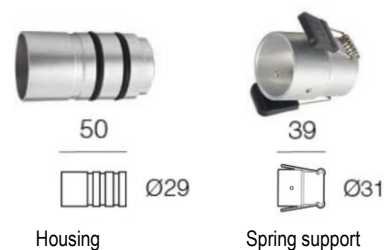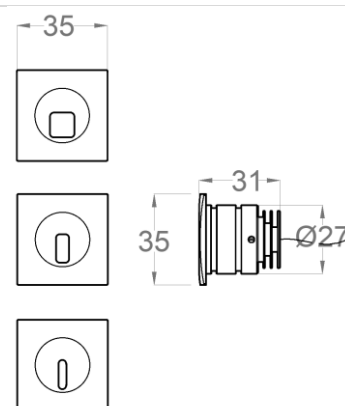

LUI 01 – 2W- 3000K			
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
45°			
1.00	2.39	45	7
2.00	4.78	11	2
3.00	7.17	5	1
4.00	9.56	3	0
5.00	11.95	2	0

