

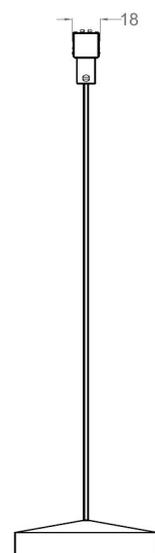
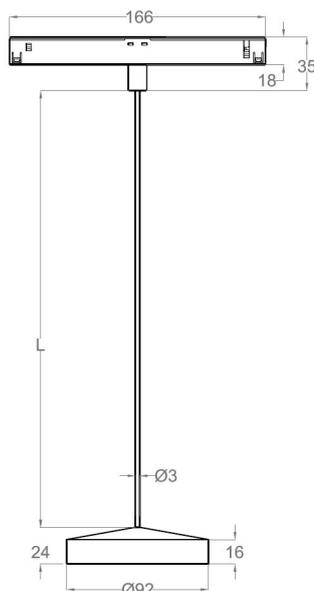


# Luna B Multi

Suspension | IP40 | Class III | Dimmable

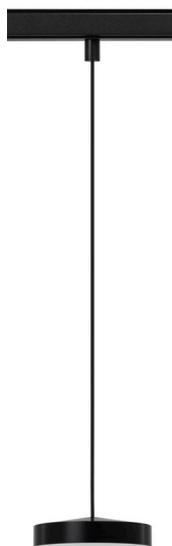

## LIGHT SOURCE & OPTIC

**Power**  
6W

**Emission**  
Diffused

**Beam Direction**  
Fixed, Symmetrical

**Material**  
Glass

**LED quantity**  
56

**Binning**  
2 MacAdam steps

**Color temperature & quality**  
2700K CRI>80  
3000K CRI>80/90  
4000K CRI>80

**Lifetime**  
(L70) >54.000 hrs

## FIXTURE

**Dimensions**  
Ø 92mm x H 24mm

**Material**  
Brass  
Aluminium

**Body finishes**  
PVD Satin Black  
PVD Polished Black  
PVD Gold Chrome  
PVD Satin Gold  
PVD Rose gold  
PVD Shiny Chrome  
Titanium  
Dark bronze  
Champagne gold

**Ceiling canopy finishes**  
Black (RAL 9005)  
White (RAL 9003)

**Weight**  
350gr

**Mounting**  
On Micro track

**Fixing**  
Adapter

## ELECTRICAL FEATURES

**Power Supply**  
Constant tension: 24 Vdc


**Driver requirement**  
Remote (not included)

**Control**  
On/off  
Broadcast  
DALI

# Luna B Multi

## PHOTOMETRIC DATA (3000K CRI>90)

6W - 105° | UGR 24



H (m)	D (m)	Eav (lx)
1	2.68	38
2	5.36	10
3	8.04	4
4	10.71	2
5	13.39	2

**Total lumen output**  
342 lm

**Efficacy**  
57 lm/W

# Luna B Multi

## INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Multisystem Track:  
Standard track (A00918.\_0)



Trimless track (A01064.\_0)




Suspended track (A01664.\_0)




## SUGGESTED REMOTE DRIVERS

**On/Off :**  
CC70-F-24-N



For On/Off and DALI version.  
Please consider 1 address for each DALI projector.

**Multifunction (DALI 2, 0/1-10V, PUSH):**  
CV75-DM-24-NI



For Broadcast version.  
Please consider 1 address for each driver in case of DALI control.

Other options upon request