


# Luna F IP65

Pendant Lighting | IP65 | Class III | Dimmable

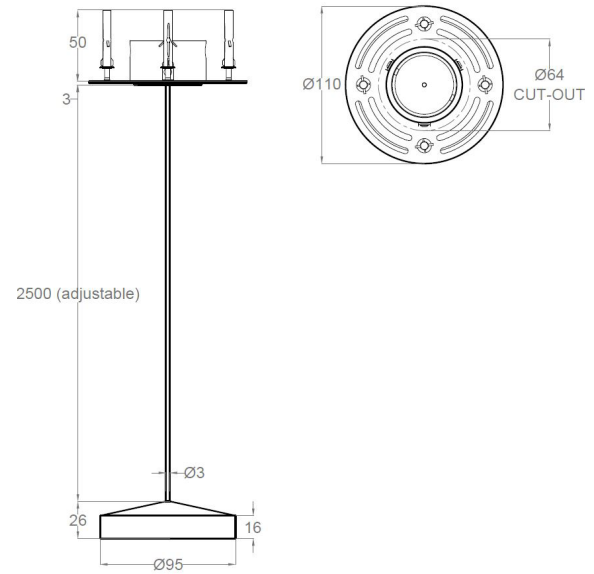

## LIGHT SOURCE & OPTIC

### Power

6W

### Emission

Diffused

### Beam Direction

Fixed, Symmetrical

### Material

Glass

### LED quantity

56

### Binning

2 MacAdam steps

### Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

### Lifetime (Ta 25°)

L70 >54.000 hrs

### Output (3000K CRI>90)

584 lm

## FIXTURE

### Dimensions

Ø 95mm x H. 26mm x L. 2500mm

### Material

Aluminium

### Body finishes

Black

Titanium

Dark bronze

Champagne gold

Gray

### Ceiling canopy finishes

Black (RAL 9005)

White (RAL 9003)

### Weight

470gr

### Mounting

Semirecessed: cut out: Ø 60mm

### Fixing

Fixing frame

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power Supply

Constant tension: 24 Vdc

### Driver requirement

Remote (not included)

### Control

On/off

Push switch

Phase Cut


0/1-10 V

Casambi

DALI

PHOTOMETRIC DATA (3000K CRI>90)

6W - 105° | UGR 26

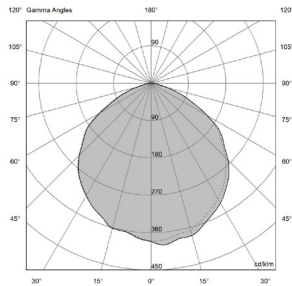

H (m)	D (m)	Eav (lx)
1	2.83	36
2	5.66	9
3	8.49	4
4	11.32	2
5	14.15	1

Total lumen output  
363 lm


Efficacy  
60 lm/W

# Luna F IP65

## INSTALLATION ACCESSORIES

Fixing rame (A01636.30)


Necessary element: please specify always 1 frame for each Fixture in the purchase order



## INSTALLATION TOOL

Hole saw (A00830.H0)


available for easier installation



## SUGGESTED REMOTE DRIVERS

**On/off:**


CV30-F-24-PI



Ø 44

**Dimmable (DALI 2):**

CV25-D-24-PI



Ø 60

Other options upon request