


Lunare 230V


Suspension | IP40 | Class II | Not dimmable

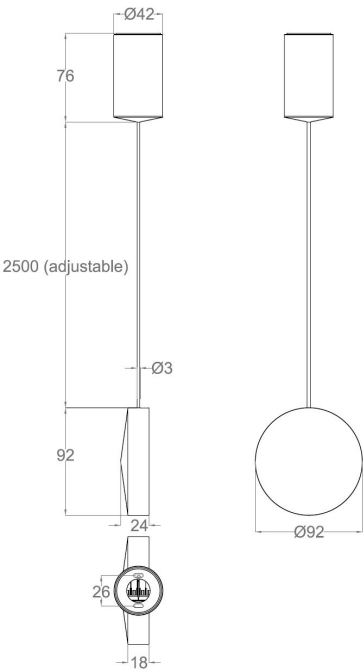

LIGHT SOURCE & OPTIC	FIXTURE	ELECTRICAL FEATURES
Power 7W	Dimensions Ø 92mm x 24mm	Power Supply Main Voltage: 220-240 Vac
Emission Diffused	Material Brass Aluminium	Driver requirement Built-in
Beam Direction Fixed, Symmetrical	Body finishes PVD Satin Black PVD Polished Black PVD Gold Chrome PVD Satin Gold PVD Rose gold PVD Shiny Chrome Titanium Dark bronze Champagne gold	Control On/off
Material Glass		
LED quantity 56		
Binning 2 MacAdam steps		
Color temperature & quality 2700K CRI>80 3000K CRI>80/90 4000K CRI>80	Ceiling canopy finishes Black (RAL 9005) White (RAL 9003)	
Lifetime (L70) >54.000 hrs	Weight 400gr	
	Mounting On surface	
	Fixing Screws	

PHOTOMETRIC DATA (3000K CRI>90)

7W - 105° | UGR 24

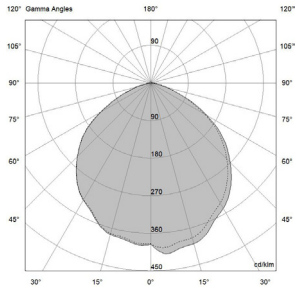

H (m)	D (m)	Eav (lx)
1	2.68	38
2	5.36	10
3	8.04	4
4	10.71	2
5	13.39	2

Total lumen output
342 lm

Efficacy
49 lm/W