


# Lunare m

Suspension | IP40 | Class III | Dimmable

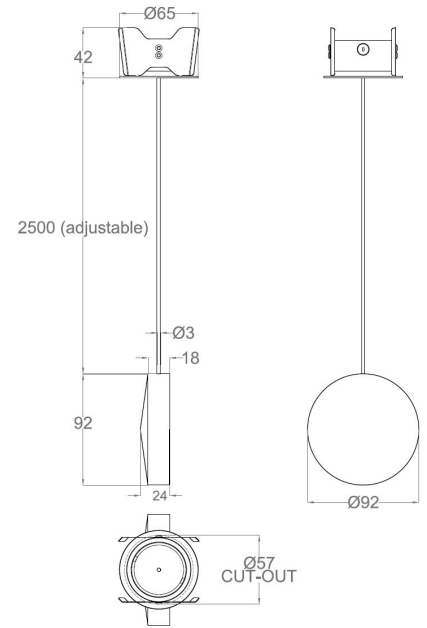

## LIGHT SOURCE & OPTIC

### Power

6W

### Emission

Diffused

### Beam Direction

Fixed, Symmetrical

### Material

Glass

### LED quantity

56

### Binning

2 MacAdam steps

### Color temperature & quality

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

### Lifetime

(L70) >54.000 hrs

## FIXTURE

### Dimensions

Ø 92mm x 24mm

### Material

Brass

Aluminium

### Body finishes

PVD Satin Black

PVD Polished Black

PVD Gold Chrome

PVD Satin Gold

PVD Rose gold

PVD Shiny Chrome

Titanium

Dark bronze

Champagne gold

### Ceiling canopy finishes

Black (RAL 9005)

White (RAL 9003)

### Weight

320gr

### Mounting

Semirecessed: cut out: Ø 57mm

### Fixing

Springs

## ELECTRICAL FEATURES

### Power Supply

Constant tension: 24 Vdc

### Driver requirement

Remote (not included)

### Control

On/off

Push switch

Phase Cut


0/1-10 V

Casambi

DALI

PHOTOMETRIC DATA (3000K CRI>90)

6W - 105° | UGR 24

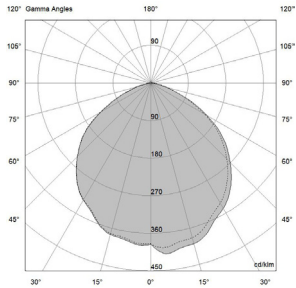

H (m)	D (m)	Eav (lx)
1	2.68	38
2	5.36	10
3	8.04	4
4	10.71	2
5	13.39	2

Total lumen output  
342 lm

Efficacy  
57 lm/W

## INSTALLATION ACCESSORIES


Fixing rame (A01756.\_0)

Necessary element: please specify always 1 frame for each Fixture in the purchase order

## SUGGESTED REMOTE DRIVERS

**On/off:**


CV20-F-24-N



Ø 60

**Multifunction (DALI 2, 0/1-10V, PUSH):**

CV25-DM-24-NI



Ø 44

Other options upon request