

LIGHT SOURCE

LED quantity	3
Power max	3 W
Total lumen output (3000K)	3W: 15° - 266 lm 30° - 248 lm 60° - 193 lm Elliptical lens - 239 lm Frosted glass - 176 lm
Efficacy lm/W (3000K)	3W: 15° - 89 lm/W 30° - 83 lm/W 60° - 64 lm/W Elliptical lens - 80 lm/W Frosted glass - 59 lm/W
CRI	>80 – >90
LED Temperature	2200K - 2700K – 3000K – 3000K CRI>90 – 4000K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	15° - 30° - 60° - elliptical lens – frosted glass
Beam direction	Adjustable +/-90°, rotating +/- 355°
Flux symmetry	Symmetrical, asymmetrical

FIXTURE

Material	Aluminum, Brass
Available finishes	Hard coat anodized: 3 - Gray 4 - Black As per material: E - Massive Brass
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Applique, stake, tree strap mounting

ELECTRICAL FEATURES

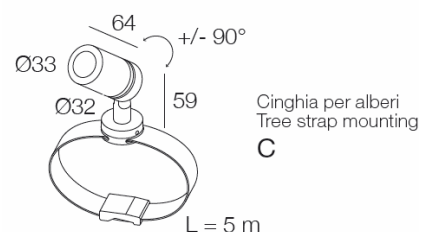
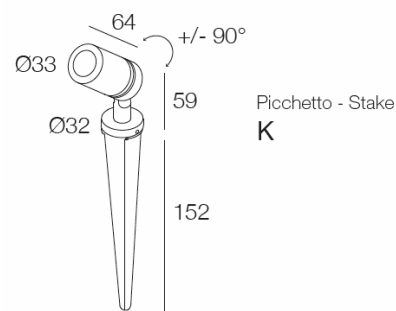

Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 350mA
Class	III

MECHANICAL FEATURES

Dimensions (body)	Ø33 x 64 mm
Weight	160 gr
Installation	Wall, ceiling, floor mounting
Cut-out	-
Use	Outdoor

ACCESSORIES

Visors	Low glare visor, low glare snoot
Filters	-
Box/ Frame	-
Fixing system	-

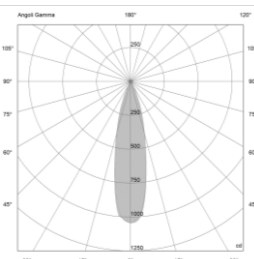
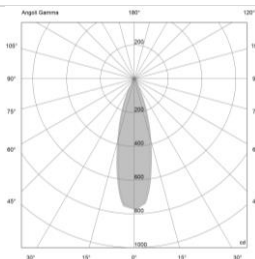
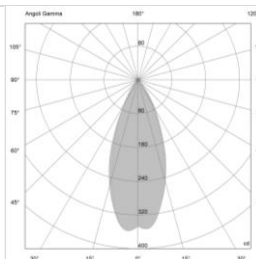

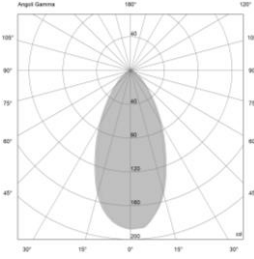


A00846._0 Low glare visor



A00847._0 Low glare snoot

PHOTOMETRIC DATA

15° Lens – 3W	30° Lens – 3W	60° Lens – 3W	Elliptical lens – 3W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>15°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.44</td><td>1045</td><td>663</td></tr> <tr> <td><u>2.00</u></td><td>0.89</td><td>261</td><td>166</td></tr> <tr> <td><u>3.00</u></td><td>1.33</td><td>116</td><td>74</td></tr> <tr> <td><u>4.00</u></td><td>1.78</td><td>65</td><td>41</td></tr> <tr> <td><u>5.00</u></td><td>2.22</td><td>42</td><td>27</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	15°				<u>1.00</u>	0.44	1045	663	<u>2.00</u>	0.89	261	166	<u>3.00</u>	1.33	116	74	<u>4.00</u>	1.78	65	41	<u>5.00</u>	2.22	42	27	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>30°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.51</td><td>773</td><td>485</td></tr> <tr> <td><u>2.00</u></td><td>1.03</td><td>193</td><td>121</td></tr> <tr> <td><u>3.00</u></td><td>1.54</td><td>86</td><td>54</td></tr> <tr> <td><u>4.00</u></td><td>2.06</td><td>48</td><td>30</td></tr> <tr> <td><u>5.00</u></td><td>2.57</td><td>31</td><td>19</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	30°				<u>1.00</u>	0.51	773	485	<u>2.00</u>	1.03	193	121	<u>3.00</u>	1.54	86	54	<u>4.00</u>	2.06	48	30	<u>5.00</u>	2.57	31	19	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>60°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.75</td><td>358</td><td>211</td></tr> <tr> <td><u>2.00</u></td><td>1.50</td><td>89</td><td>53</td></tr> <tr> <td><u>3.00</u></td><td>2.25</td><td>40</td><td>23</td></tr> <tr> <td><u>4.00</u></td><td>2.99</td><td>22</td><td>13</td></tr> <tr> <td><u>5.00</u></td><td>3.74</td><td>14</td><td>8</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	60°				<u>1.00</u>	0.75	358	211	<u>2.00</u>	1.50	89	53	<u>3.00</u>	2.25	40	23	<u>4.00</u>	2.99	22	13	<u>5.00</u>	3.74	14	8	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>25x40</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.46</td><td>632</td><td>387</td></tr> <tr> <td><u>2.00</u></td><td>0.92</td><td>158</td><td>97</td></tr> <tr> <td><u>3.00</u></td><td>1.39</td><td>70</td><td>43</td></tr> <tr> <td><u>4.00</u></td><td>1.85</td><td>39</td><td>24</td></tr> <tr> <td><u>5.00</u></td><td>2.31</td><td>25</td><td>15</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	25x40				<u>1.00</u>	0.46	632	387	<u>2.00</u>	0.92	158	97	<u>3.00</u>	1.39	70	43	<u>4.00</u>	1.85	39	24	<u>5.00</u>	2.31	25	15
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
15°																																																																																																																			
<u>1.00</u>	0.44	1045	663																																																																																																																
<u>2.00</u>	0.89	261	166																																																																																																																
<u>3.00</u>	1.33	116	74																																																																																																																
<u>4.00</u>	1.78	65	41																																																																																																																
<u>5.00</u>	2.22	42	27																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
30°																																																																																																																			
<u>1.00</u>	0.51	773	485																																																																																																																
<u>2.00</u>	1.03	193	121																																																																																																																
<u>3.00</u>	1.54	86	54																																																																																																																
<u>4.00</u>	2.06	48	30																																																																																																																
<u>5.00</u>	2.57	31	19																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
60°																																																																																																																			
<u>1.00</u>	0.75	358	211																																																																																																																
<u>2.00</u>	1.50	89	53																																																																																																																
<u>3.00</u>	2.25	40	23																																																																																																																
<u>4.00</u>	2.99	22	13																																																																																																																
<u>5.00</u>	3.74	14	8																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
25x40																																																																																																																			
<u>1.00</u>	0.46	632	387																																																																																																																
<u>2.00</u>	0.92	158	97																																																																																																																
<u>3.00</u>	1.39	70	43																																																																																																																
<u>4.00</u>	1.85	39	24																																																																																																																
<u>5.00</u>	2.31	25	15																																																																																																																
Frosted glass – 3W																																																																																																																			
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>Frost. glass</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.92</td><td>188</td><td>104</td></tr> <tr> <td><u>2.00</u></td><td>1.84</td><td>47</td><td>26</td></tr> <tr> <td><u>3.00</u></td><td>2.76</td><td>21</td><td>12</td></tr> <tr> <td><u>4.00</u></td><td>3.68</td><td>12</td><td>7</td></tr> <tr> <td><u>5.00</u></td><td>4.61</td><td>8</td><td>4</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	Frost. glass				<u>1.00</u>	0.92	188	104	<u>2.00</u>	1.84	47	26	<u>3.00</u>	2.76	21	12	<u>4.00</u>	3.68	12	7	<u>5.00</u>	4.61	8	4																																																																																							
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
Frost. glass																																																																																																																			
<u>1.00</u>	0.92	188	104																																																																																																																
<u>2.00</u>	1.84	47	26																																																																																																																
<u>3.00</u>	2.76	21	12																																																																																																																
<u>4.00</u>	3.68	12	7																																																																																																																
<u>5.00</u>	4.61	8	4																																																																																																																

NOTES

Provided with 200 cm neoprene