


Projectors

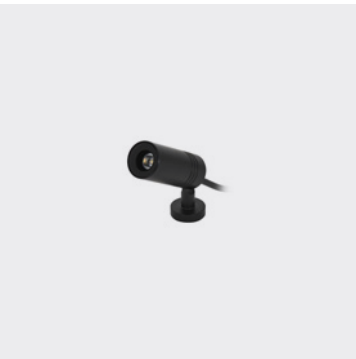


Milli

700mA	2,5W
Lumen Output 3000K cRI > 90 700mA - 120 lm	
10° Lens	734555._ _ _
25° Lens	764555._ _ _
40° Lens	744555._ _ _
60° Lens	754555._ _ _

Milli with hex louver

700mA	2,5W
Lumen Output 3000K cRI > 90 700mA - 85 lm	
10° Lens	734563._ _ _
25° Lens	764563._ _ _
40° Lens	744563._ _ _
60° Lens	754563._ _ _

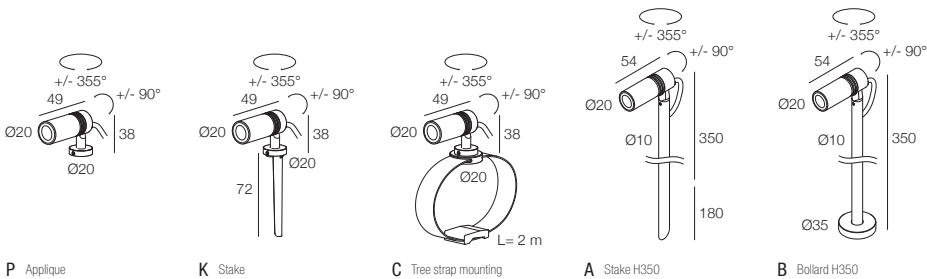

FINISH	CCT	FIXING
4 Black	U 2200K	P Applique
VC Fir Green	X 2700K cRI > 90	K Stake
MS Bright Brown	W 3000K cRI > 90	C Tree strap mounting
E Massive Brass	K 3500K cRI > 90	A Stake H350
3 Gray	D 4000K cRI > 90	B Bollard H350
6 Stainless Steel AISI 316L		



SUGGESTED DRIVERS (not included)

700mA CC14-F-700-PI p. 705


ACCESSORIES



Low glare visor
A01445._0



Low glare snoot
A01444._0



Watertight connector p. 682
A00357.40

EXAMPLE CODE COMPOSITION

123456.

FIXING
CCT
FINISH