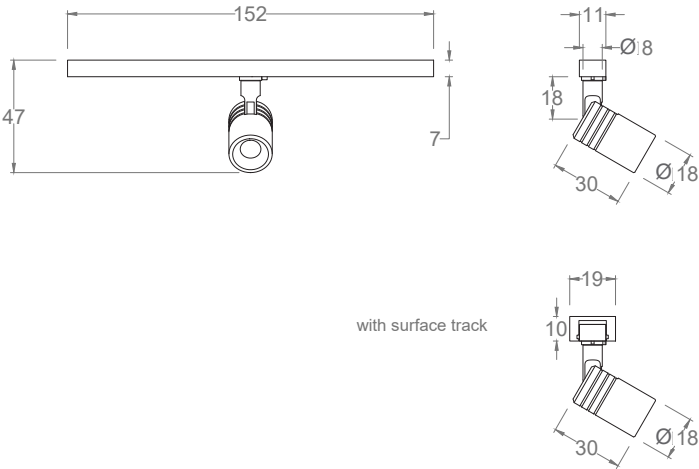


Mini Tini B Micro

Low voltage track projectors | IP40 | Class III | Dimmable



LIGHT SOURCE & OPTIC

Power

2W
3W

Lens

10°/25°/40°/60°

Beam Direction

Adjustable:
Tilting +/-90°, rotating +/-355°
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90
5000K CRI>80

Lifetime (Ta 25°)

L80 >76.700 hrs

Output (3000K CRI>90)

86 lm - 2W / 111 lm - 3W

FIXTURE

Dimensions

Ø 18mm x H 30mm (cylinder)

Material

Aluminium

Body finishes

Black (RAL 9005)
Dark Bronze
White (RAL 9003)

Weight

32gr

Mounting

On track

Fixing

Track Connector

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension:
24-48Vdc
Typical Vf= 3V

Driver requirement





Remote (not included)





Control

On/off
DALI
Broadcast

Mini Tini B Micro

PHOTOMETRIC DATA (3000K CRI>90)

2W - 10° UGR 10			2W - 25° UGR 13			2W - 40° UGR 26			2W - 60° UGR 29		
											
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.23	582	1	0.33	338	1	0.66	75	1	1.13	30
2	0.45	145	2	0.65	84	2	1.33	19	2	2.27	8
3	0.68	65	3	0.98	38	3	1.99	8	3	3.40	3
4	0.90	36	4	1.31	21	4	2.65	5	4	4.53	2
5	1.13	23	5	1.63	14	5	3.31	3	5	5.67	1
Total lumen output 74 lm			Total lumen output 80 lm			Total lumen output 66 lm			Total lumen output 63 lm		
Efficacy 37 lm/W			Efficacy 40 lm/W			Efficacy 33 lm/W			Efficacy 31 lm/W		

3W - 10° UGR 11			3W - 25° UGR 14			3W - 40° UGR 26			3W - 60° UGR 31		
											
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.23	779	1	0.33	449	1	0.66	102	1	1.14	40
2	0.45	195	2	0.65	112	2	1.32	25	2	2.27	10
3	0.68	87	3	0.98	50	3	1.98	11	3	3.43	4
4	0.90	49	4	1.31	28	4	2.64	6	4	4.57	3
5	1.13	31	5	1.64	18	5	3.30	4	5	5.72	2
Total lumen output 100 lm			Total lumen output 107 lm			Total lumen output 88 lm			Total lumen output 84 lm		
Efficacy 33 lm/W			Efficacy 36 lm/W			Efficacy 29 lm/W			Efficacy 28 lm/W		

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified. For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 090126

Mini Tini B Micro

INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Micro Track:

Standard track (A00918._0)
1m



Trimless track (A01064._0)
1m




Suspended track (A01664._0)
1m




SUGGESTED REMOTE DRIVER

On/Off :
CC70-F-24-N
CV70-F-48-N



For On/Off and DALI version.
Please consider 1 address for each DALI projector.

Multifunction (DALI 2, 0/1-10V, PUSH):
CV75-DM-24-NI
CV75-DM-48-NI



For Broadcast version.
Please consider 1 address for each driver in case of DALI control.

Other options upon request