

LIGHT SOURCE

| | |
|----------------------------|--------------------------------------|
| LED quantity | 126 |
| Power max | 14 W |
| Total lumen output (3000K) | 670 lm |
| Efficacy lm/W (3000K) | 48 lm/W |
| LOR (3000K) | - |
| CRI | >80 - >90 |
| LED Temperature (K) | 2700K - 3000K – 3000K CRI>90 - 4000K |
| Average operational life | 50.000 hours |

OPTIC

| | |
|------------------|-------------------|
| Material | Polycarbonate |
| Available optics | Diffused emission |
| Beam direction | Fixed |
| Flux symmetry | Symmetrical |
| Accessories | - |

LED FIXTURE

| | |
|---------------------|--|
| Material | Aluminum, Tempered glass |
| Finish | Painted (Gold, Black, Agate gray, Intense Bronze, White, Oyster white) |
| Available finishes | Gold, Black, Agate gray, Intense Bronze, White, Oyster white |
| IP Rate | IP40 |
| Working Temperature | -20° ÷ +40° |
| Accessories | - |

ELECTRICAL FEATURES

| | |
|------------------------|----------------------|
| Driver | Remote |
| Dimmable | Push, 1-10V, DALI |
| For emergency lighting | - |
| Connection | In parallel at 24Vdc |
| Class | III |



MECHANICAL FEATURES

| | |
|-----------------|---------------|
| Dimensions (mm) | Ø149 x 51 |
| Weight | 1190 gr |
| Mounting | Wall, ceiling |
| Cut out (mm) | - |
| Use | Indoor |

NOTES



design by Valerio Sommella & Anonima Luci

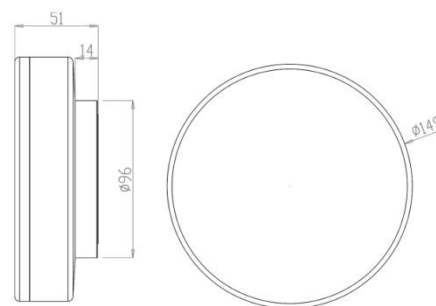

14W

| H(m) | D(m) | E _{max} (lx) | E _{av} (lx) |
|------|------|-----------------------|----------------------|
| 113° | | | |
| 0.60 | 1.82 | 654 | 160 |
| 1.20 | 3.64 | 163 | 40 |
| 1.80 | 5.47 | 73 | 18 |
| 2.40 | 7.29 | 41 | 10 |
| 3.00 | 9.11 | 26 | 6 |