


POIS 70

Surface lights | IP40 | Class III | Dimmable

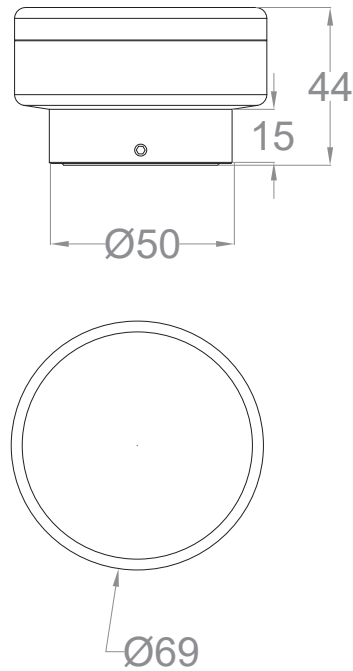

LIGHT SOURCE & OPTIC

Power

4W

Lens

Diffuse emission

Beam Direction

Fixed, Symmetrical

Material

Glass

LED quantity

35

Binning

2 MacAdam steps

Color temperature & quality

2700K
3000K CRI>80
3000K CRI>90
4000K

Lifetime

(L70) >54.000 hrs

FIXTURE

Dimensions

Ø 69mm x H 44mm

Material

Aluminium

Body finishes

Black (RAL 9005)
Intense Bronze
Gold
Agate Gray (RAL 7038)
OysterWhite (RAL1013)
White (RAL 9003)

Weight

225gr

Mounting

Surface Mounting

Fixing

Applique

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
24Vdc
Typical Vf= 24V

Driver requirement


Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

PHOTOMETRIC DATA (3000K CRI>90)

4W | UGR 26

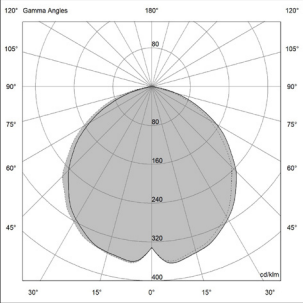

H (m)	D (m)	Eav (lx)
1	2.90	12
2	5.80	3
3	8.70	1
4	11.60	1
5	14.50	0

Total lumen output
131 lm


Efficacy
33 lm/W

POIS 70

SUGGESTED REMOTE DRIVERS

On/off:


CV20-F-24-N



Ø 60

Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-24-NI



Ø 44

Other options upon request