


Tono iR IP67

Recessed Light | IP67 | Class III | Dimmable

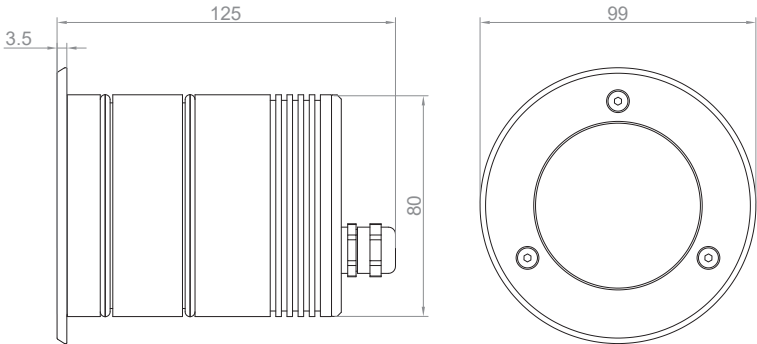

LIGHT SOURCE & OPTIC

Power

3W
6W
7W

Lens

3°
10°
30°
50°

Beam Direction

Adjustable +/-20°
Rotating +/-360°

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2700K
3000K
3000K CRI>90
3500K
4000K

Lifetime

(L90) >55.000 hrs

FIXTURE

Dimensions

Ø 60mm x H 93mm

Material

Aluminium

Body finishes

Black
Grey
Stainless Steel 361L

Weight

780gr

Mounting

Recessed

Fixing

Wall - Floor Recessed

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Main Voltage:
24 Vdc
500 mA
900 mA

Driver requirement


Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI





Tono iR IP67

PHOTOMETRIC DATA (3000K CRI>90)

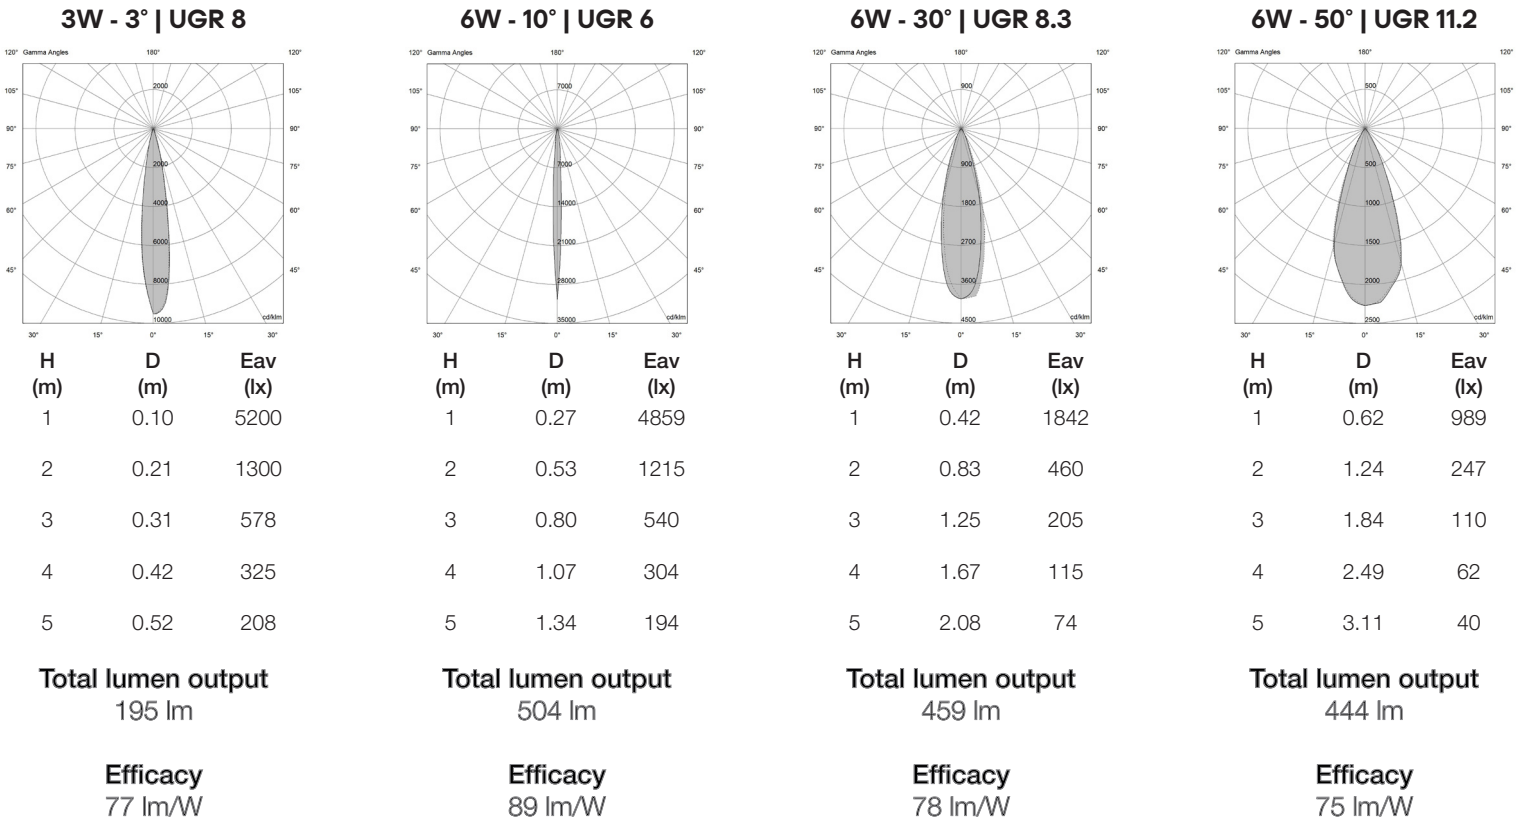

Tono iR IP67


PHOTOMETRIC DATA (3000K CRI>90 - Hex louver)

3W - 3° UGR 1.5				6W - 10° UGR 2.3				6W - 30° UGR 3.3				6W - 50° UGR 3.9			
															
H (m)	D (m)	Eav (lx)		H (m)	D (m)	Eav (lx)		H (m)	D (m)	Eav (lx)		H (m)	D (m)	Eav (lx)	
1	0.11	4327		1	0.25	4211		1	0.37	1571		1	0.53	852	
2	0.22	1082		2	0.50	1053		2	0.74	393		2	1.07	213	
3	0.33	481		3	0.74	468		3	1.11	175		3	1.60	95	
4	0.44	270		4	0.99	263		4	1.48	98		4	2.13	53	
5	0.55	173		5	1.24	168		5	1.85	63		5	2.66	34	
Total lumen output 147 lm				Total lumen output 374 lm				Total lumen output 307 lm				Total lumen output 276 lm			
Efficacy 60 lm/W				Efficacy 66 lm/W				Efficacy 53 lm/W				Efficacy 47 lm/W			


Tono iR IP67

INSTALLATION ACCESSORIES


Alluminium recessed box (A00276.40)

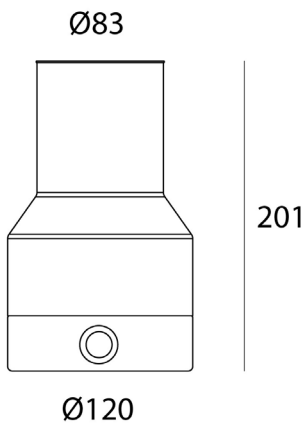

Plastic recessed box (A00204.30)

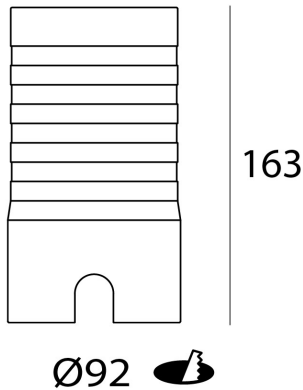


Watertight connector (A00387.40)

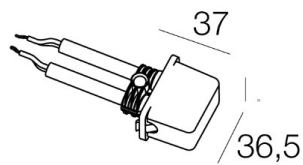

SUGGESTED REMOTE DRIVER

On/off:

CC14-F500-PI / CC14-F900-PI
CV30-F-24-PI

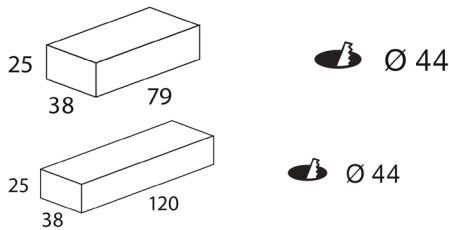

Multifunction (DALI 2, 0/1-10V, PUSH):

CC20-M-500-P / CC10-D-900-PI
CV25-D-24-PI

