


Zoom mR

Small downlights | IP40 | Class III | Dimmable

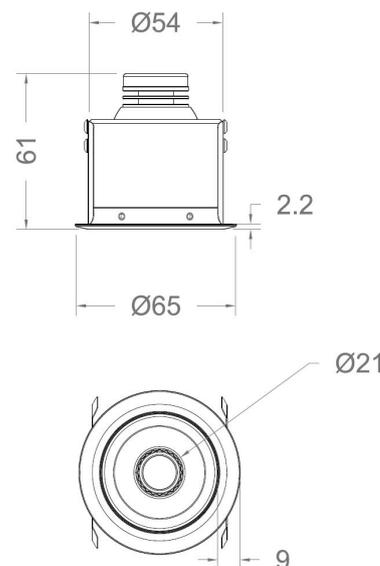

LIGHT SOURCE & OPTIC

Power
4W

Zoom Lens
10° >40°

Beam Direction
Adjustable:
Tilting +/-25°, Rotating +/-360°,
Symmetrical

Material
Optical glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80
3000K CRI>80/90
4000K CRI>80
5000K CRI>80

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 65mm x H 61mm

Material
Aluminium

Module finishes
Black
Gray
White (RAL9003)

Weight
170gr

Mounting
Recessed: cut out Ø 54mm

Fixing
Springs

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
350 mA
Typical Vf= 3V


Driver requirement
Remote (not included)

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI


Zoom mR

PHOTOMETRIC DATA (3000K CRI>90)

4W - 10° | UGR 8



4W - 40° | UGR 2



H (m)	D (m)	Eav (lx)
1	0.21	354
2	0.42	88
3	0.62	39
4	0.83	22
5	1.04	14

H (m)	D (m)	Eav (lx)
1	0.67	108
2	1.34	27
3	2.01	12
4	2.68	7
5	3.35	4

Total lumen output
23 lm

Efficacy
6 lm/W


Total lumen output
54 lm

Efficacy
14 lm/W


SUGGESTED REMOTE DRIVERS

On/Off :

CC20-F-350-N

 Ø 55**Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):**

CC25-DM-350-N

 Ø 55

Other options upon request