


Downlights

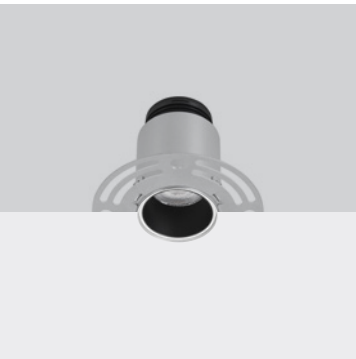

IP40

500
700

220 g


Ø50

2

SD
CM

TM
66

2,5



Ariel AF fixing frame

| | |
|--------------|-----------|
| FIXING FRAME | A00861.30 |
|--------------|-----------|

Ariel AF module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE

| | | |
|-----------------------------------|----------------------|------------------------|
| 500 / 700mA Lumen Output 3000K | 9W 500mA - 900 lm | 13W 700mA - 1100 lm |
| 14° Lens [1] | 7Q4408. _ _ _ _ | 7Q4409. _ _ _ _ |
| 18° Lens | 784408. _ _ _ _ | 784409. _ _ _ _ |
| 24° Lens | 7G4408. _ _ _ _ | 7G4409. _ _ _ _ |
| 33° Lens | 7E4408. _ _ _ _ | 7E4409. _ _ _ _ |
| 52° Lens | 754408. _ _ _ _ | 754409. _ _ _ _ |

| MODULE FINISH | CCT | DECORATIVE RING | OPTICAL FILTER |
|-------------------|---------------------|------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 | ● 4 Black | W Without Filter |
| ● M8 Brown | ● B2 2400K CRI > 90 | ● I Gold Chrome | E Elliptical Filter |
| ● G3 Gray | ● X 2700K CRI > 90 | ● 8 Satin Gold | H Hex Louver |
| ● C Gothic Cement | ● X1 2700K CRI > 95 | ● N Satin Nickel | P Prismatic Filter |
| ● G7 Beige Gray | ● 6 3000K | ● 1 Shiny Chrome | S Softening Lens |
| ● A6 Gray White | ● W 3000K CRI > 90 | | |
| ● S Warm White | ● W1 3000K CRI > 95 | | |
| ● 7 White | ● K 3500K CRI > 90 | | |
| | ● K1 3500K CRI > 95 | | |
| | ● D 4000K CRI > 90 | | |



SUGGESTED DRIVERS (not included)

| | | |
|-------|---------------|--------|
| 500mA | CC10-F-500-SI | p. 700 |
| 700mA | CC23-F-700-SP | p. 702 |

INTERCHANGEABLE ACCESSORIES



Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION

| | |
|---------|-----------------|
| 123456. | OPTICAL FILTER |
| | DECORATIVE RING |
| | CCT |
| | MODULE FINISH |