


Ariel B Multi dynamic white

Low voltage track projectors | IP40 | Class III | Dimmable



Module

Interchangeable accessories

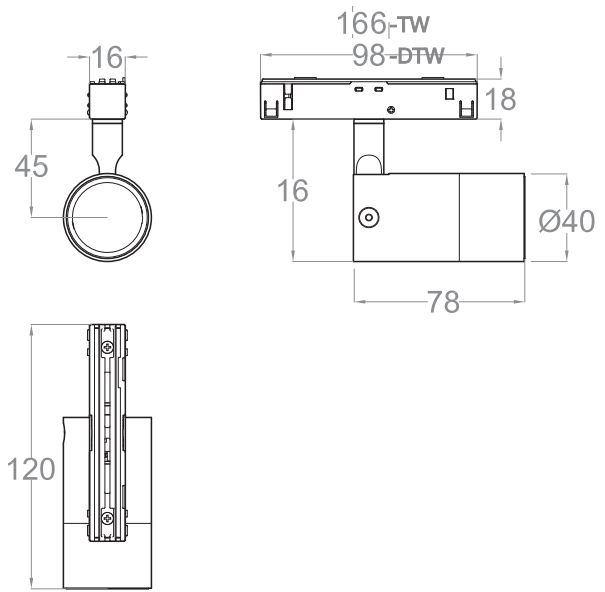

LIGHT SOURCE & OPTIC

Power
10W

Lens
33°/ 52° - interchangeable

Beam Direction
Adjustable:
Tilting +/- 90°, Rotating +/- 355°,
Symmetrical

Material
PMMA

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
DIM TO WARM 1800K-3000K CRI>90
TUNABLE WHITE 1800K-4000K CRI>90

Lifetime
L80 B50 >88.000 hrs

Ouput
DTW 3000K CRI>90: 918 lm
TW 1800K CRI>90: 626 lm
TW 4000K CRI>90: 976 lm

FIXTURE

Dimensions
Ø 40mm x H 78mm (cylinder)

Material
Aluminium

Module finishes
Warm White (RAL 9010)
White (RAL 9003)
Gray White (RAL 9002)
Gothic Cement (RAL 7033)
Gray (RAL 7012)
Beige Gray (RAL 7006)
Brown (RAL 8019)
Black (RAL 9005)

Filter holder finishes
Gold Chrome
Shiny Chrome
Satin Gold
Satin Nickel
Black

Weight
160gr

Mounting
On Track

Fixing
Track connector

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant tension:
48 Vdc
Typical Vf= 18V


Driver
Remote (not included)

Control
DALI

Ariel B Multi dynamic white

PHOTOMETRIC DATA (TUNABLE WHITE 1800K CRI>90)

10W - 33° | UGR 19




H (m)	D (m)	Eav (lx)
1	0.65	473
2	1.30	118
3	1.96	53
4	2.61	30
5	3.26	19

Total lumen output
373 lm

Efficacy
37 lm/W

10W - 52° | UGR 20




H (m)	D (m)	Eav (lx)
1	1.19	237
2	2.39	59
3	3.58	26
4	4.78	15
5	5.97	9

Total lumen output
592 lm

Efficacy
59 lm/W

PHOTOMETRIC DATA (TUNABLE WHITE 4000K CRI>90)

10W - 33° | UGR 22




H (m)	D (m)	Eav (lx)
1	0.63	575
2	1.25	189
3	1.88	84
4	2.51	47
5	3.13	30

Total lumen output
420 lm

Efficacy
42 lm/W

10W - 52° | UGR 23




H (m)	D (m)	Eav (lx)
1	1.17	380
2	2.33	95
3	3.50	42
4	4.66	24
5	5.83	15

Total lumen output
668 lm

Efficacy
67 lm/W

PHOTOMETRIC DATA (DIM TO WARM 3000K CRI>90)

10W - 33° | UGR 19




H (m)	D (m)	Eav (lx)
1	0.61	806
2	1.22	202
3	1.83	90
4	2.44	50
5	3.05	32

Total lumen output
575 lm

Efficacy
57 lm/W

10W - 52° | UGR 22



H (m)	D (m)	Eav (lx)
1	1.12	383
2	2.24	96
3	3.36	43
4	4.49	24
5	5.61	15

Total lumen output
629 lm

Efficacy
63 lm/W

Ariel B Multi dynamic white

INTERCHANGEABLE ACCESSORIES

Optical Filters

Hex louver
Elliptical Filter
Prismatic filter
Softening lens

Lenses

33°/ 52°

Decorative rings

Black
Gold Chrome
Satin Gold
Satin Nickel
Shiny Chrome

1m

INSTALLATION ACCESSORIES

Compatible with 48Vdc Multi Track:

Standard track (A00918._0)



Trimless track (A01064._0)




Suspended track (A01664._0)



SUGGESTED REMOTE DRIVERS

On/Off :

CV70-F-48-N



Please consider 1 address for each DALI projector.