

Downlights



IP40

500

1320 g

Ø61

2

2,5

TYPE

UL LISTED

Ø61
[2 3/8"]

SD
CM

TM
66


Ariel In&Out F fixing plate

	O/1...10V DIMMING	DALI DIMMING
FIXING PLATE	A01546.4R	A01546.4D


Ariel In&Out F module

500mA Lumen Output 3000K	9W 500mA - 900 lm
14° Lens [1]	7Q4421.____-UL
18° Lens	784421.____-UL
24° Lens	7G4421.____-UL
33° Lens	7E4421.____-UL
52° Lens	754421.____-UL

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

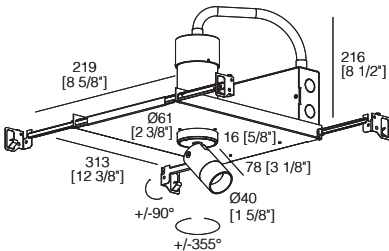

[1] 12° Lens not interchangeable

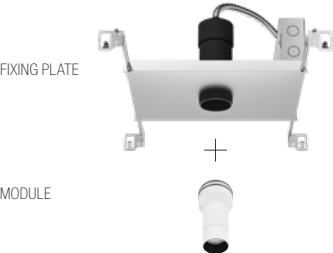

discover more

INTERCHANGEABLE ACCESSORIES



EXAMPLE CODE COMPOSITION

123456.	-UL
	OPTICAL FILTER
	DECORATIVE RING
	CCT
	MODULE FINISH