Ariel In&Out F IP55 Wall Washer

Indoor | Downlights | IP55 | Class III | Dimmable




Fixing frame



+

Module



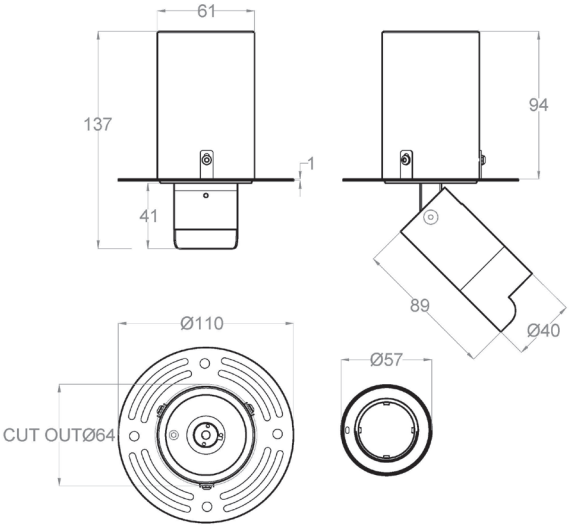

LIGHT SOURCE & OPTIC

Power
9W
11W

Lens
Wall washer

Beam Direction
Adjustable:
Tilting +/-90°, rotating +/-355°,
Asymmetrical

Material
PC

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>90
2400K CRI>90
2700K CRI>90/95
3000K CRI>80/90/95
3500K CRI>90/95
4000K CRI>90

Lifetime (Ta 25°)
L_{70} >77.000 hrs

Source Flux (3000K CRI>90)
14°: 872 lm / 978 lm
18°/ 24°/ 33°/ 52°: 1028 lm / 1208 lm

FIXTURE

Dimensions
Ø 110mm x H 137mm

Material
Aluminium

Body finishes
Warm White (RAL 9010)
White (RAL 9003)
Gray White (RAL 9002)
Gothic Cement (RAL 7033)
Gray (RAL 7012)
Beige Gray (RAL 7006)
Brown (RAL 8019)
Black (RAL 9005)

Weight
530gr

Mounting
Semirecessed: cut out Ø 64mm

Fixing
Fixing frame for trimless flush mount

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
500 mA
600mA
Typical Vf= 18V

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 041126

Ariel In&Out F IP55 Wall Washer

PHOTOMETRIC DATA (3000K CRI>90)

9W - WW | UGR 33x20




H (m)	D (m)	Eav (lx)
1	1.66-1.92	180
2	3.32-3.83	45
3	4.98-5.75	20
4	6.64-7.66	11
5	8.30-9.58	7

Total lumen output
836 lm

Efficacy
93 lm/W

11W - WW | UGR 32x20



H (m)	D (m)	Eav (lx)
1	1.64-1.88	218
2	3.27-3.75	54
3	4.91-3.75	24
4	6.54-5.63	14
5	8.18-7.50	9

Total lumen output
983 lm


Efficacy
89 lm/W

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 041126

Ariel In&Out F IP55 Wall Washer


INSTALLATION ACCESSORIES

Fixing frame (A01850._0)
Necessary element: please specify always 1 frame for each Fixture in the purchase order




INSTALLATION TOOL

Hole saw (A00830.H0)
available for easier installation



SUGGESTED REMOTE DRIVERS


On/Off :
CC10-F-500-SI




CC20-F-600-NI



Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):
CC15-D-500-S



CC15-D-600-S



Other options upon request

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 041126