Ariel RF


Downlights



IP40 | 250 500 600 | 450 g | Ø86 | 2 | [2] | 2,5

Ariel RF fixing frame

FIXING FRAME	A00656.30

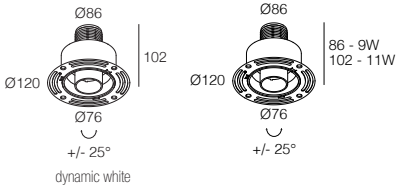

[1] 14° Lens not interchangeable

[2] not available for tunable white

FIXING FRAME



+

MODULE



Ariel RF module

500 / 600mA Lumen Output 3000K	9W 500mA - 900 lm	11W 600mA - 1100 lm
14° Lens [1]	7Q4425._ _ _ _	7Q4992._ _ _ _
18° Lens	784425._ _ _ _	784992._ _ _ _
24° Lens	7G4425._ _ _ _	7G4992._ _ _ _
33° Lens	7E4425._ _ _ _	7E4992._ _ _ _
52° Lens	754425._ _ _ _	754992._ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

Ariel RF dynamic white module

250mA Lumen Output 3000K CRI > 90	9W 250mA - 670 lm
33° Lens	7E4949._ _ _ _
52° Lens	754949._ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM 1800K / 3000K CRI > 90
- M2 TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

discover more

SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI
600mA	CC20-F-600-N
250mA DW (T)	CC25-DM-250-N
250mA TW (M2)	CC45-D-2x250-N

INTERCHANGEABLE ACCESSORIES





Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION

123456.
- OPTICAL FILTER
- DECORATIVE RING
- CCT
- MODULE FINISH