

Projectors



[1] 14° Lens not interchangeable



IP40



250  
500  
700



170 g




2



66



2,5

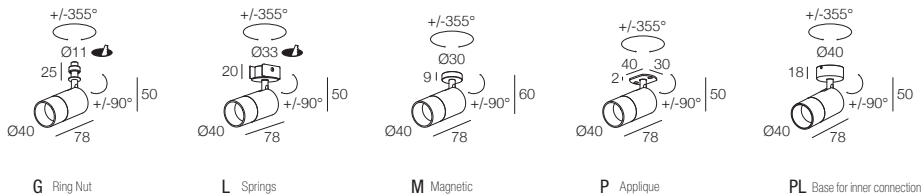

Ariel

| 500 / 700mA<br><small>Lumen Output 3000K</small> | 9W<br><small>500mA - 900 lm</small> | 13W<br><small>700mA - 1100 lm</small> |
|--|-------------------------------------|---------------------------------------|
| 14° Lens [1]                                     | 7Q4597. _ _ _ _                     | 7Q4598. _ _ _ _                       |
| 18° Lens   | 784597. _ _ _ _                     | 784598. _ _ _ _                       |
| 24° Lens   | 7G4597. _ _ _ _                     | 7G4598. _ _ _ _                       |
| 33° Lens   | 7E4597. _ _ _ _                     | 7E4598. _ _ _ _                       |
| 52° Lens   | 754597. _ _ _ _                     | 754598. _ _ _ _                       |

| FINISH            | CCT                 | DECORATIVE RING  | OPTICAL FILTER      | FIXING                       |
|-------------------|---------------------|------------------|---------------------|------------------------------|
| ● H Black         | ● U1 2200K CRI > 90 | ● 4 Black        | W Without Filter    | G Ring Nut                   |
| ● M8 Brown        | ● B2 2400K CRI > 90 | ● 8 Satin Gold   | E Elliptical Filter | L Springs                    |
| ● G3 Gray         | ● X 2700K CRI > 90  | ● I Gold Chrome  | H Hex Louver        | M Magnetic                   |
| ● C Gothic Cement | ● X1 2700K CRI > 95 | ● N Satin Nickel | P Prismatic Filter  | P Applique                   |
| ● G7 Beige Gray   | ● 6 3000K           | ● 1 Shiny Chrome | S Softening Lens    | PL Base for inner connection |
| ● A6 Gray White   | ● W 3000K CRI > 90  |                  |                     |                              |
| ● S Warm White    | ● W1 3000K CRI > 95 |                  |                     |                              |
| ○ 7 White         | ● K 3500K CRI > 90  |                  |                     |                              |
|                   | ● K1 3500K CRI > 95 |                  |                     |                              |
|                   | ● D 4000K CRI > 90  |                  |                     |                              |

Ariel dynamic white

| 250mA<br><small>Lumen Output 3000K CRI &gt; 90</small> | 9W<br><small>250mA - 670 lm</small> |
|--|-------------------------------------|
| 33° Lens   | 7E4973. _ _ _ _                     |
| 52° Lens   | 754973. _ _ _ _                     |

| FINISH            | CCT                                       | DECORATIVE RING  | OPTICAL FILTER      | FIXING                       |
|-------------------|---|------------------|---------------------|------------------------------|
| ● H Black         | ● T DIM TO WARM 1800K / 3000K CRI > 90    | ● 4 Black        | W Without Filter    | G Ring Nut                   |
| ● M8 Brown        | ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 | ● 8 Satin Gold   | E Elliptical Filter | L Springs                    |
| ● G3 Gray         |   | ● I Gold Chrome  | H Hex Louver        | M Magnetic                   |
| ● C Gothic Cement |   | ● N Satin Nickel | P Prismatic Filter  | P Applique                   |
| ● G7 Beige Gray   |   | ● 1 Shiny Chrome | S Softening Lens    | PL Base for inner connection |
| ● A6 Gray White   |   |                  |                     |                              |
| ● S Warm White    |   |                  |                     |                              |
| ○ 7 White         |   |                  |                     |                              |



SUGGESTED DRIVERS (not included)

|               |                |        |
|---------------|----------------|--------|
| 500mA         | CC10-F-500-SI  | p. 700 |
| 700mA         | CC23-F-700-SP  | p. 702 |
| 250mA DW (T)  | CC25-DM-250-N  |        |
| 250mA TW (M2) | CC45-D-2x250-N |        |

INTERCHANGEABLE ACCESSORIES



p. 676

EXAMPLE CODE COMPOSITION

