Ariel


Projectors



Ariel PL

[1] 14° Lens not interchangeable

IP40 | 250 500 600 | 170 g | 2 | 2,5

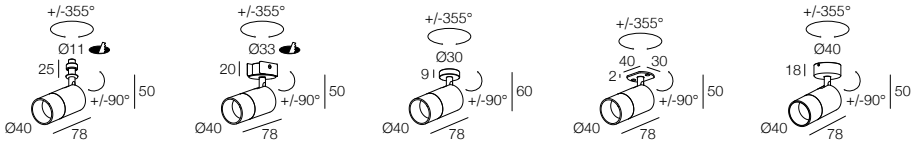

G Ring Nut | L Springs | M Magnetic | P Applique | PL Base for inner connection

Ariel

500 / 600mA Lumen Output 3000K	9W 500mA - 900 lm	11W 600mA - 1100 lm
14° Lens [1]	7Q4597._ _ _ _ _	7Q4998._ _ _ _ _
18° Lens	784597._ _ _ _ _	784998._ _ _ _ _
24° Lens	7G4597._ _ _ _ _	7G4998._ _ _ _ _
33° Lens	7E4597._ _ _ _ _	7E4998._ _ _ _ _
52° Lens	754597._ _ _ _ _	754998._ _ _ _ _

FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- 8 Satin Gold
- I Gold Chrome
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

FIXING

- G Ring Nut
- L Springs
- M Magnetic
- P Applique
- PL Base for inner connection

Ariel dynamic white

250mA Lumen Output 3000K CRI > 90	9W 250mA - 670 lm
33° Lens	7E4973._ _ _ _ _
52° Lens	754973._ _ _ _ _

FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM 1800K / 3000K CRI > 90
- M2 TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4 Black
- 8 Satin Gold
- I Gold Chrome
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

FIXING

- G Ring Nut
- L Springs
- M Magnetic
- P Applique
- PL Base for inner connection

discover more

SUGGESTED DRIVERS (not included)

500mA	CC20-F-500-N
600mA	CC20-F-600-N
250mA DW (T)	CC25-DM-250-N
250mA TW (M2)	CC45-D-2x250-N

INTERCHANGEABLE ACCESSORIES



EXAMPLE CODE COMPOSITION

123456.

- 1 FIXING
- 2 OPTICAL FILTER
- 3 DECORATIVE RING
- 4 CCT
- 5 FINISH