










## ARMONIA BRIDGE


-  IP40
-  Class III
-  Montaggio a pavimento  
Floor mounting
-  Luce continua  
Dotless
-  Collegare in parallelo 24Vdc  
Connect in parallel at 24Vdc
-  350 gr/m
-  Ø 6 mm
-  Altamente riciclabile  
Highly recyclable




**Due potenze disponibili**  
**Luce perfettamente omogenea**  
**Dimensioni contenute**

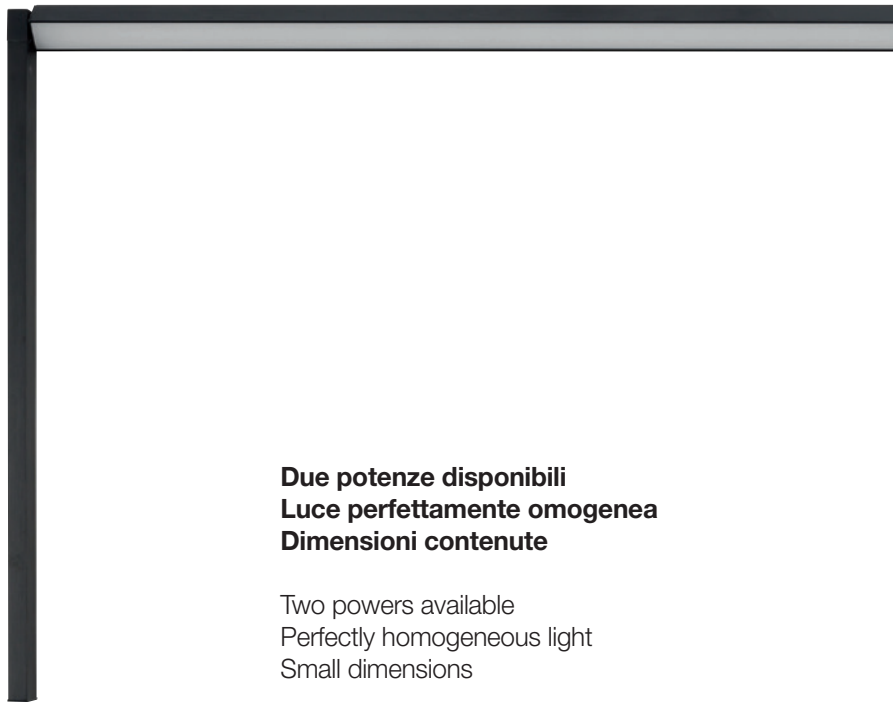
Two powers available  
Perfectly homogeneous light  
Small dimensions


### ARMONIA BRIDGE LINEAR LENS

	12W/m 24Vdc	25W/m 24Vdc	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	950lm/m	1700lm/m		
 40° Linear Lens	AI125-_____	AI225-_____	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ccc; border: 1px solid #000; margin-right: 5px;"></span> 3 Grigio - Gray</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #000; border: 1px solid #000; margin-right: 5px;"></span> 4 Nero - Black</li> </ul>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f96; border: 1px solid #000; margin-right: 5px;"></span> U 2200K</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f9c; border: 1px solid #000; margin-right: 5px;"></span> Q 2500K</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> X 2700K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> W 3000K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> K 3500K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> D 4000K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> 1 5000K</li> </ul>

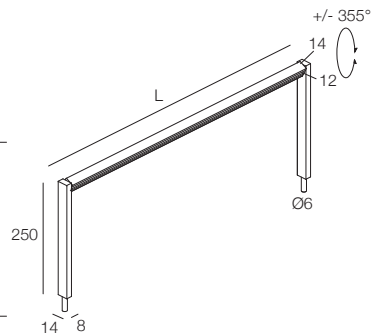

### ARMONIA BRIDGE OPAL COVER

	12W/m 24Vdc	25W/m 24Vdc	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	700lm/m	1300lm/m		
 Copertura opalina Opal cover	AP125-_____	AP225-_____	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ccc; border: 1px solid #000; margin-right: 5px;"></span> 3 Grigio - Gray</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #000; border: 1px solid #000; margin-right: 5px;"></span> 4 Nero - Black</li> </ul>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f96; border: 1px solid #000; margin-right: 5px;"></span> U 2200K</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f9c; border: 1px solid #000; margin-right: 5px;"></span> Q 2500K</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> X 2700K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> W 3000K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> K 3500K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> D 4000K CRI &gt; 90</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border: 1px solid #000; margin-right: 5px;"></span> 1 5000K</li> </ul>

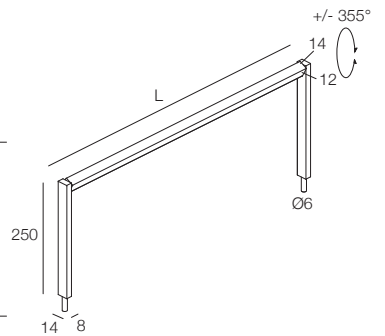

Lunghezze ottimizzate (cm)  
Optimized lengths (cm)

031 034 037 040 043 046 049 052 055 058 061 064 067 070 073 076 079 082 085 088 091 094 097 100 103 106  
109 112 115 118

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N

EXAMPLE CODE COMPOSITION  
**12345-**  
Length in cm  
9 cm step  
min 031 - max 118

LED COLOUR  
FINISH